



Chroma-Q™
BRILLIANT SOLUTIONS

Specification Sheet - Version: 1.2

Chroma-Q™ Magic Box™

8>4 DMX A/B Switch


Part No: CHMBDMXAB

DESCRIPTION

The device shall use a manual switch to change the DMX source between two lighting consoles e.g. master and back-up.
The device shall fit customised front of house racks.

FEATURES

- Changes the DMX source between two x 2048 channel lighting consoles of up to 4 DMX universes each e.g master and back-up.
- Controlled by simple but effective manually operated switch.
- For ensuring the highest possible level of reliability, the unit uses no power, electronics or software.
- Unique Magic Box interlocking enclosure facilitates rack mounting when used in pairs and truss mounting via captive nut insert.
- Designed for customised front of house racks.

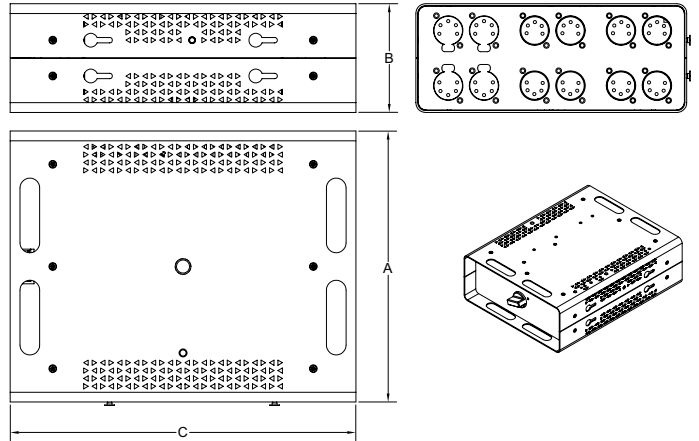

OVERALL SPECIFICATIONS

Net dimensions:	Width (A): 220mm / 8.6"
	Height (B): 88mm / 3.5"
	Depth (C): 280mm / 11"
Net weight:	2.7kg / 6.0lbs
Shipping dimensions:	Width: 250mm / 9.8"
	Height: 125mm / 4.9"
	Depth: 300mm / 11.8"
Shipping weight:	3.2kg / 7.1lbs
Colour:	black
DMX connector In:	8 x XLR5
DMX connector Out:	4 x XLR5

ORDERING INFORMATION

Chroma-Q Magic Box 8>4 DMX A/B Switch CHMBDMXAB

ACCESSORIES

- Chroma-Q Magic Box pair of rack ears MBEAR
- Chroma-Q Magic Box 8-Way DMX Buffer MBDMX8
- Chroma-Q Magic Box PS12 Power Supply MBPS12

