



Chroma-Q®
BRILLIANT SOLUTIONS

Specification Sheet - Version: 1.0
Chroma-Q® Color Force II 72 RGBA
Part No: CHCF272RGBA

DESCRIPTION

The Chroma-Q® Color Force II 72™ is part of the next-generation of solutions which take performance to an all-new level.

Using the very latest fully homogenised optics found in the popular Chroma-Q Color One 100™ product range, the Color Force II fixtures' output is a single, clean and pure beam of light, delivering a superior colour blend with no unsightly colour mixing shadows.

The homogenised optics and improved Chroma-Q technology provide even higher quality saturates and pastels, and a purer white with no skittles – all from a single source.

Factory calibration ensures all Color Force II units are colour matched, so side by side they will be outputting the exact same colour.

The new models also provide more creative control, with twice as many light engines accommodated within the same fixture lengths – providing independently controllable cells every 3 inches.

FEATURES

- Up to 18,600 lumens – at least 50% more output compared to predecessors
- Homogenised output – superior colour blend & no unsightly colour-mixing shadows
- Even more creative control – twice as many light engines
- Theatrical grade dimming
- Practical, user friendly design
- Superior unit-to-unit consistency
- Optional internal LumenRadio
- Chroma-Q's proven LED performance
- Touchscreen user interface

ORDERING INFORMATION

CHCF272RGBA: Chroma-Q Color Force II 72 RGBA

CHCF272RGBALR: Chroma-Q Color Force II 72 RGBA w LumenRadio Installed

ACCESSORIES

CHCFBL72: Chroma-Q Border lens for Color Force 72

CHCFCL72: Chroma-Q Cyc lens for Color Force 72

OVERALL SPECIFICATIONS

Net Dimensions (without fixings):	Length: 1,759mm / 69.25" Width: 165mm / 6.5" Height: 191mm / 7.5"
Net Weight:	24kg / 53lb
Shipping Dimensions:	Length: 1,855mm / 73" Width: 305mm / 12" Height: 320mm / 12.5"
Shipping Weight:	27 kg / 59 lbs
Power Supply:	Built-in
Power Input Rating:	100-240V AC 50-60Hz 800VA
Power Factor:	0.96 @ 120V AC, 0.99 @ 240V AC
Power Consumption:	800W @ 120V AC, 800W @ 240V AC
Inrush Current:	80A @ 120V AC
Idle Power Consumption:	29W @ 120V AC, 32W @ 240V AC
Typical Power & Current:	Measurements done with all LEDs at maximum intensity. Measurements made at nominal voltage. Allow for a deviation of +/- 10%
Power Connectors In/Out:	Neutrik powerCON TRUE1
Data Connectors In/Out:	Neutrik XLR 5-pin
Max Fixtures in Series:	2 x fixtures @110V, 4 x Fixtures @220V
Control Protocol:	ANSI E1.11 USITT DMX 512-A
Cooling System:	Forced
Operating Temperature:	0°C to 40°C
Construction:	Anodised aluminium extrusion
Colour:	Black
Built-In Hardware:	Quick release lever for tilt adjustment
IP Rating:	IP20
Control Modes:	Strobe Options, RGBA, RGB, HSI, x1, x2, x3, x4, x6, x8, x12, x24, Look Select, Master, Odd / Even, Skip2, Skip3, Skip6
Dimming Curve:	Theatrical
Variable Effects Engine:	Strobe, Strobe on Top, Strobe Random
Hot Lumen Output (Combined):	18,600 lm
Optics:	Fully homogenised lenses
Beam Angle:	22° (approx.)
Beam Distribution:	Asymmetrical direct illumination
CCT:	Adjustable 1,000 - 10,000K
Colour Gamut:	Performance enhanced
CRI:	92
Lamp Life:	L70 at 50,000 hours
Approvals:	CISPR 22 :2006/EN55022 :2006 & CISPR 24 :1997/EN55024 :1998, ICES-003 :2004 & FCC Part 15 Subpart B: 2007, CSA C22. No. 166-M1983:R2008 UL 1573:2003; UL 8750




Chroma-Q[®]
BRILLIANT SOLUTIONS

Specification Sheet - Version: 1.0
Chroma-Q[®] Color Force II 72 RGBA
Part No: CHCF272RGBA

PHOTOMETRICS


NO LENS



	Throw Distance		Beam Spread		Field Spread		Full On	
	M	FT	M	FT	M	FT	LUX*	FC*
1	3.28	0.4	1.31	0.8	2.62	85,963	7,986.22	
2	6.56	0.8	2.62	1.6	5.25	21,490	1,996.49	
3	9.84	1.1	3.61	2.4	7.87	9,551	887.32	
4	13.12	1.5	4.92	3.2	10.50	5,372	499.07	
5	16.40	1.9	6.23	4.1	13.45	3,438	319.40	
6	19.69	2.3	7.55	4.9	16.08	2,387	221.76	

* measured at centre of beam


CYC LENS



	Throw Distance		Beam Spread		Field Spread		Full On	
	M	FT	M	FT	M	FT	LUX*	FC*
1	3.28	0.8	2.62	2.8	9.19	27,357	2,541.55	
2	6.56	1.6	5.25	5.6	18.37	6,839	635.36	
3	9.84	2.4	7.87	8.3	27.23	3,039	282.33	
4	13.12	3.2	10.50	11.1	36.42	1,709	158.77	
5	16.40	4.0	13.12	13.9	45.60	1,094	101.64	
6	19.69	4.8	15.75	16.7	54.79	759	70.51	

* measured at centre of beam


BORDER LENS



	Throw Distance		Beam Spread		Field Spread		Full On	
	M	FT	M	FT	M	FT	LUX*	FC*
1	3.28	0.6	1.97	1.6	5.25	28,759	2,671.80	
2	6.56	1.3	4.27	3.2	10.50	7,189	667.88	
3	9.84	1.9	6.23	4.8	15.75	3,195	296.83	
4	13.12	2.5	8.20	6.4	21.00	1,797	166.95	
5	16.40	3.2	10.50	8.0	26.25	1,150	106.84	
6	19.69	3.8	12.47	9.6	31.50	798	74.14	

* measured at centre of beam

DIMENSIONS

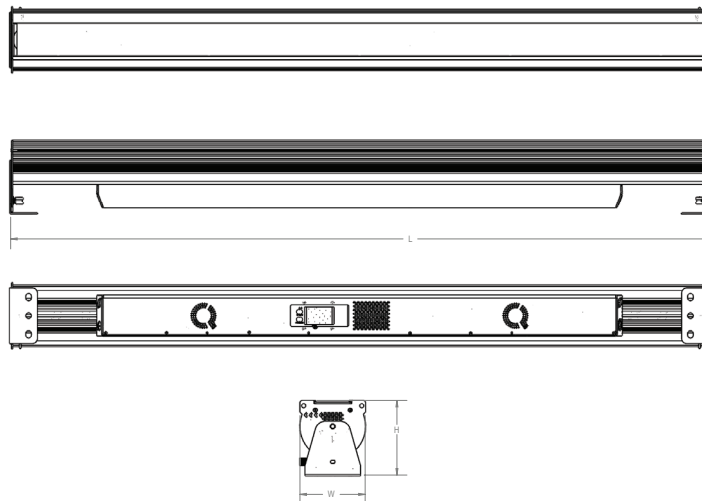

Chroma-Q and all associated product names are recognised trademarks, for more information visit www.chroma-q.com/trademarks. The rights and ownership of all trademarks are recognised. Whilst every effort has been made to ensure that the information is correct, Chroma-Q accepts no liability for errors or omissions. Technical specifications and data are provided for guidance only. Because we constantly aim to improve our products, we reserve the right to amend or alter at any time and without prior notice, the specifications of any product. E&OE.