

# IES Photometric Report 2inspire 300

Chroma-Q\_2inspire\_300\_Medium\_4800K\_HoneycombLouver.IES



Generated: 5/4/2026 1:39:04 PM

Generated: 5/4/2026 1:39:04 PM

Fixture Information


Manufacturer	Chroma-Q	Max Candela	2992.3 cd
Luminaire	LED Projector Luminaire at 4800K setting	Est. Total Lumens	872 lm
Lamp	LEDs	Beam Angle (50%)	27.4°
Format	IESNA:LM-63-2002	Field Angle (10%)	56.6°
Wattage	53.9 W	Phot. Type	Type C (Vertical)
Lumens/Lamp	873 lm	Units	Meters
Num Lamps	1	W x L x H	-0.120 x -0.120 x 0.000
Ballast Factor	1.000		


Photometric Data


V Angles	181 (0° – 180°)
H Angles	25 (0° – 360°)

IES Keywords

[TEST]	EV-2002
[TESTLAB]	Spectrum mfg
[TESTDATE]	2025-4-22
[ISSUEDATE]	2025-04-22 10:43:08
[LAMPPOSITION]	0,0
[OTHER]	EVERFINE GO-2000A_V1 SYSTEM
[MANUFAC]	Chroma-Q
[LUMCAT]	2inspire-POE-300_Medium_HoneycombLouver(4800K)
[LUMINAIRE]	LED Projector Luminaire at 4800K setting
[LAMP]	LEDs
[BALLAST]	DC
[BALLASTCAT]	
[_VOLTAGE]	77.9
[_CURRENT]	0.69
[_WATTAGE]	53.8
[_PF]	0.63
[_THD]	0.0
[_LUMENS]	872
[_EFFICACY]	16.21
[_STABILIZATION TIME]	70

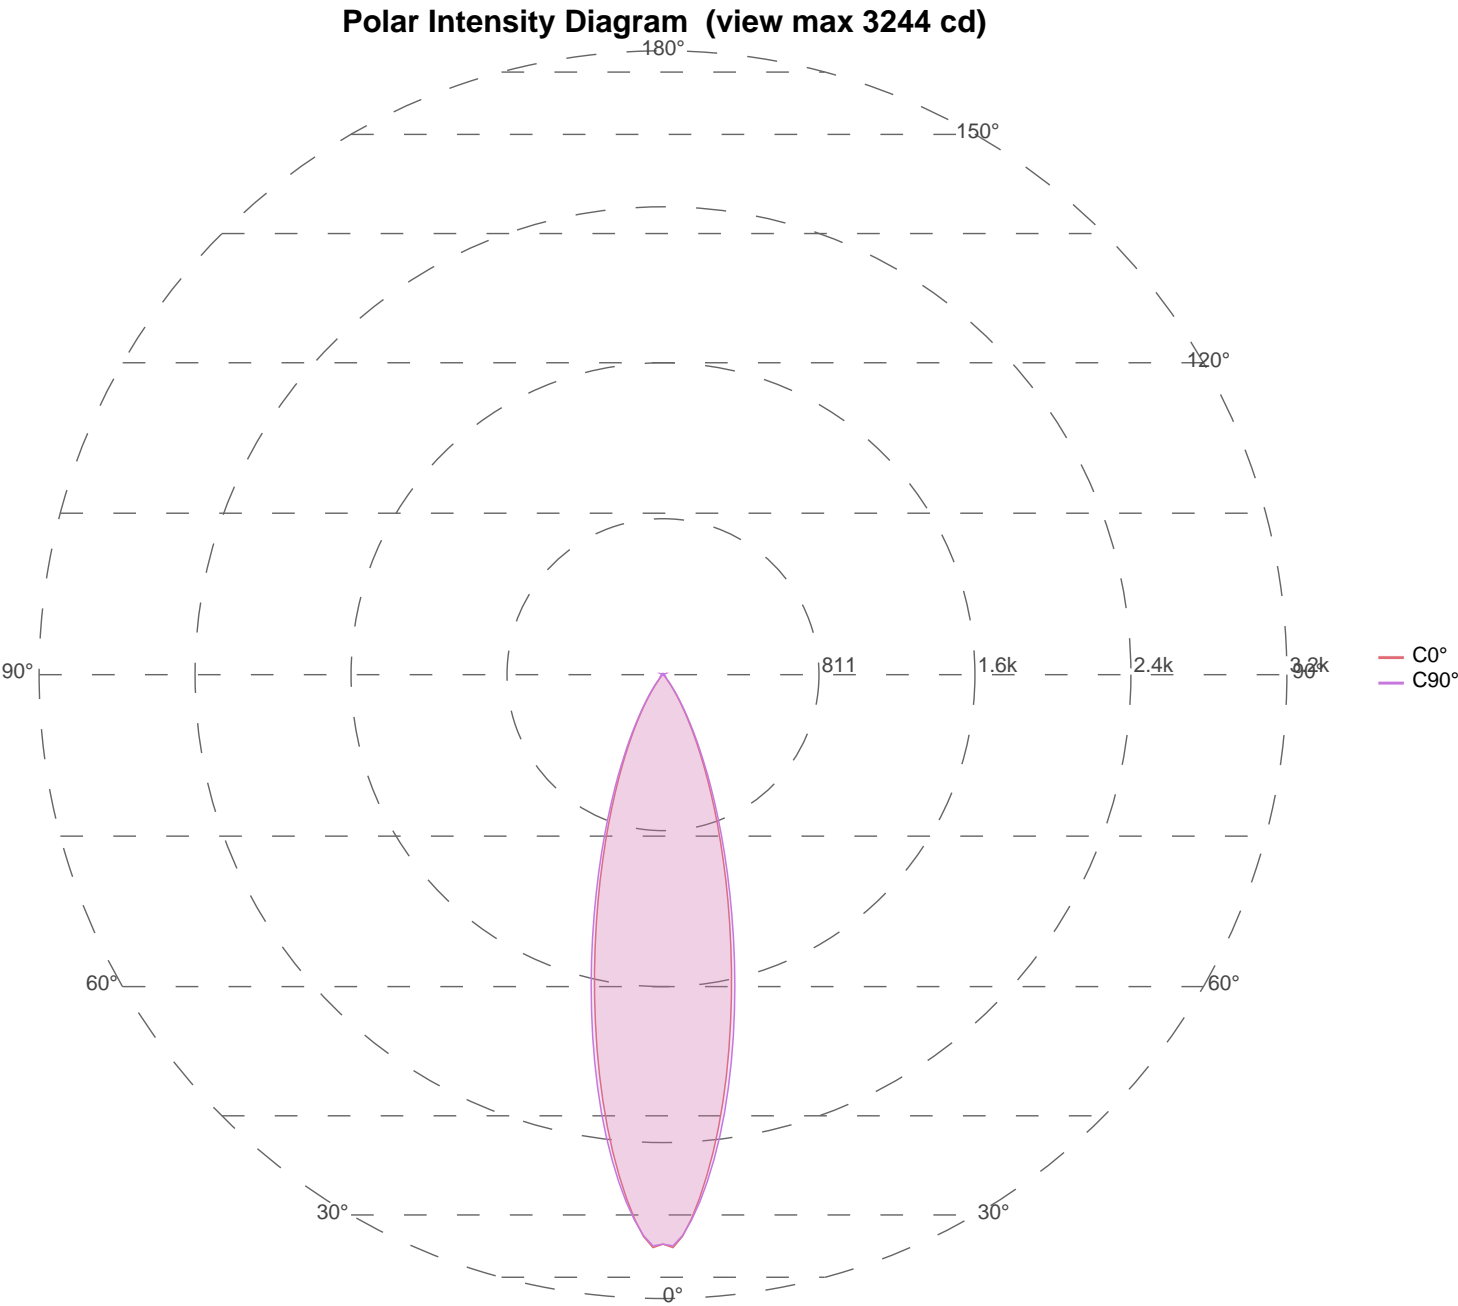

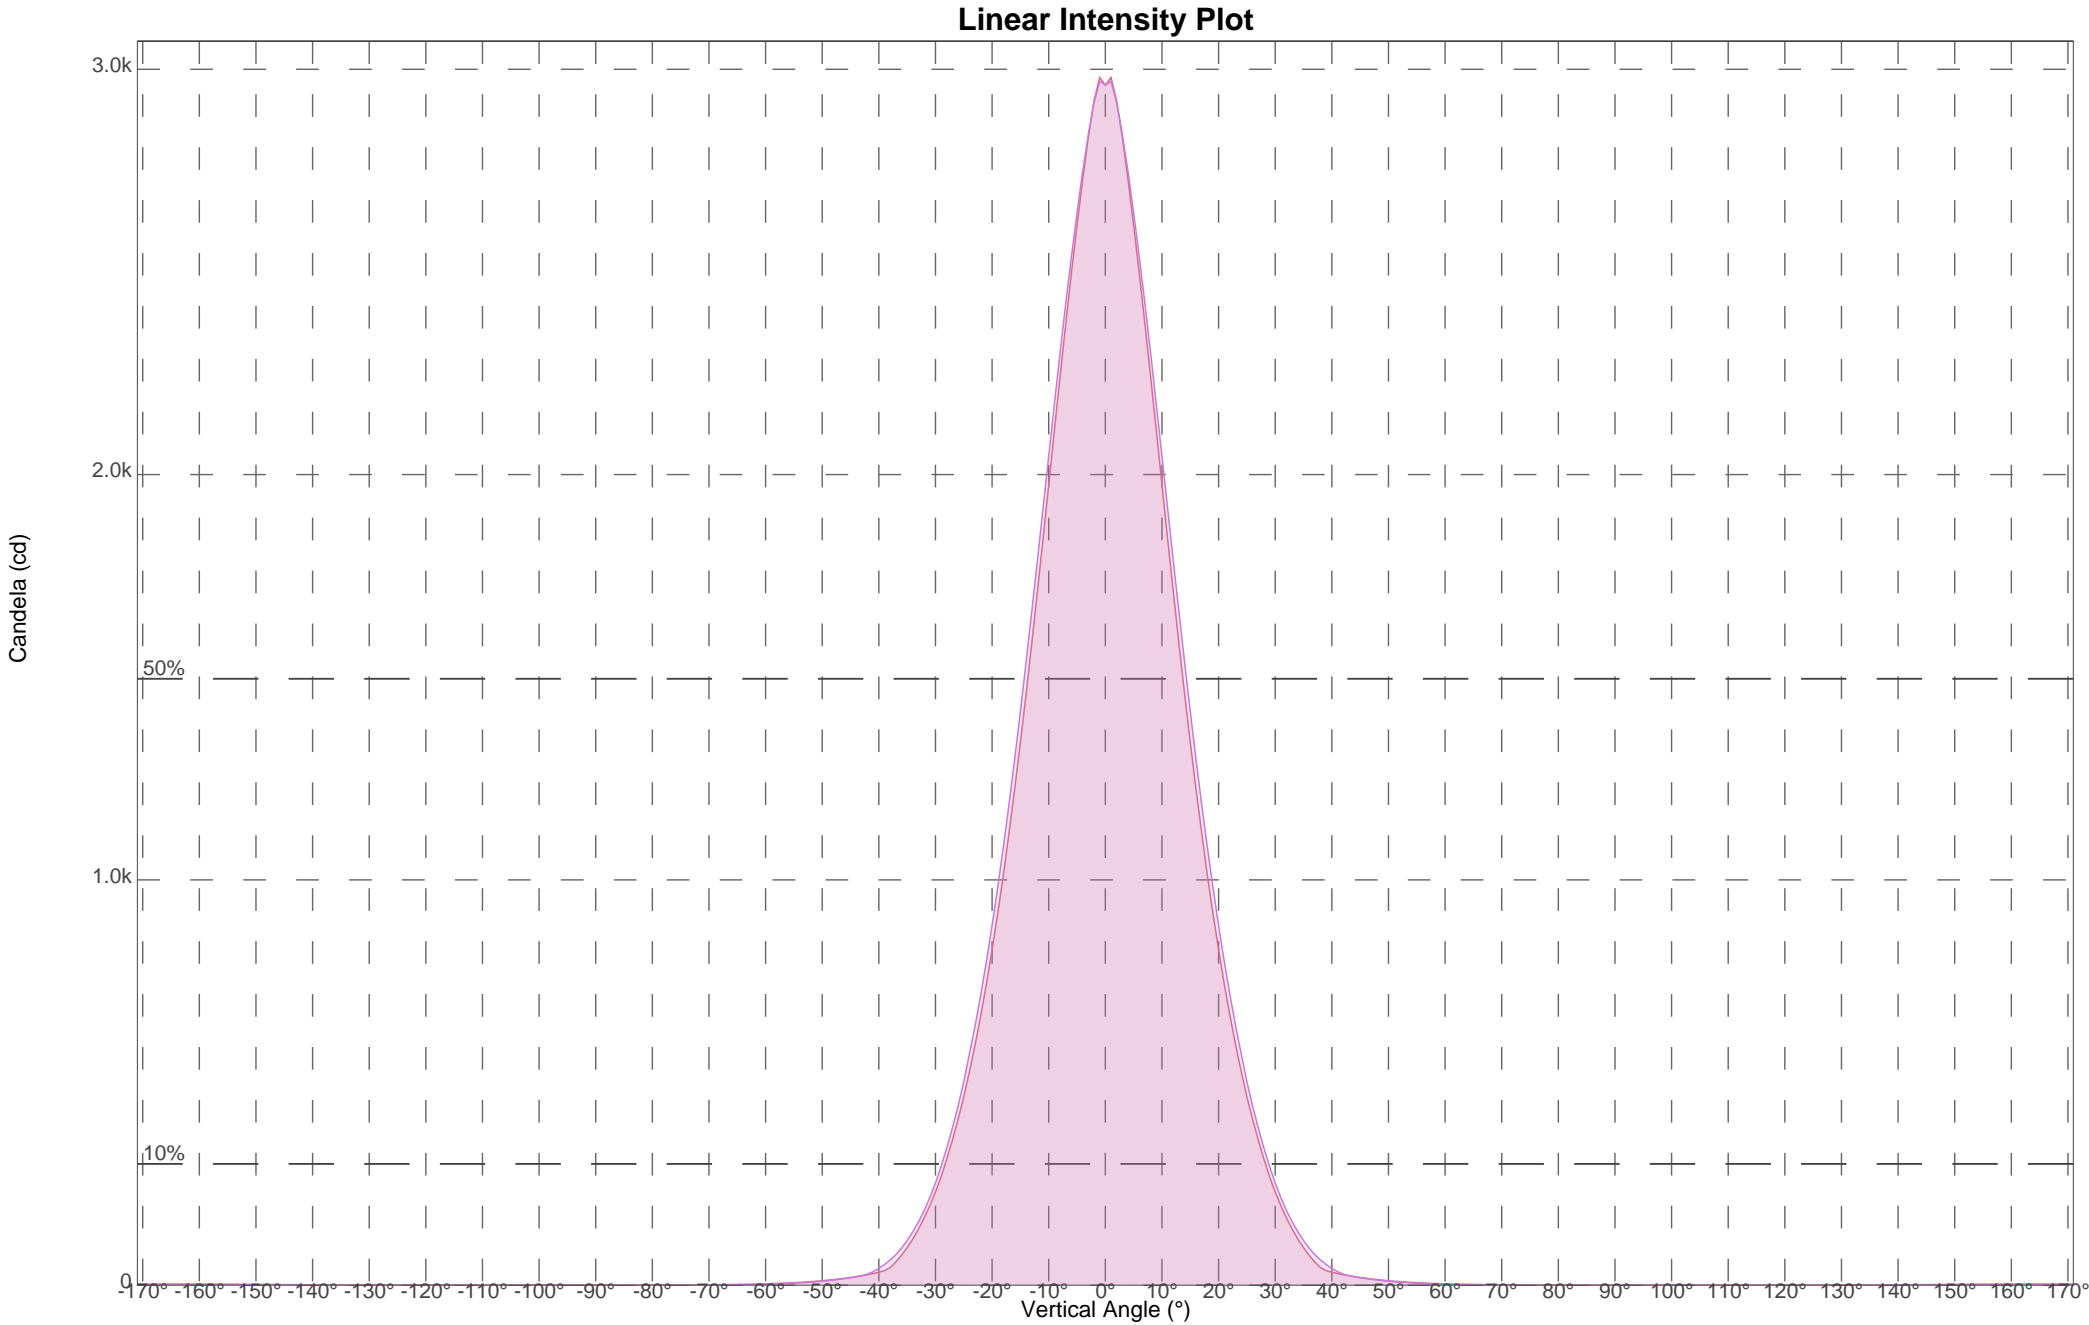

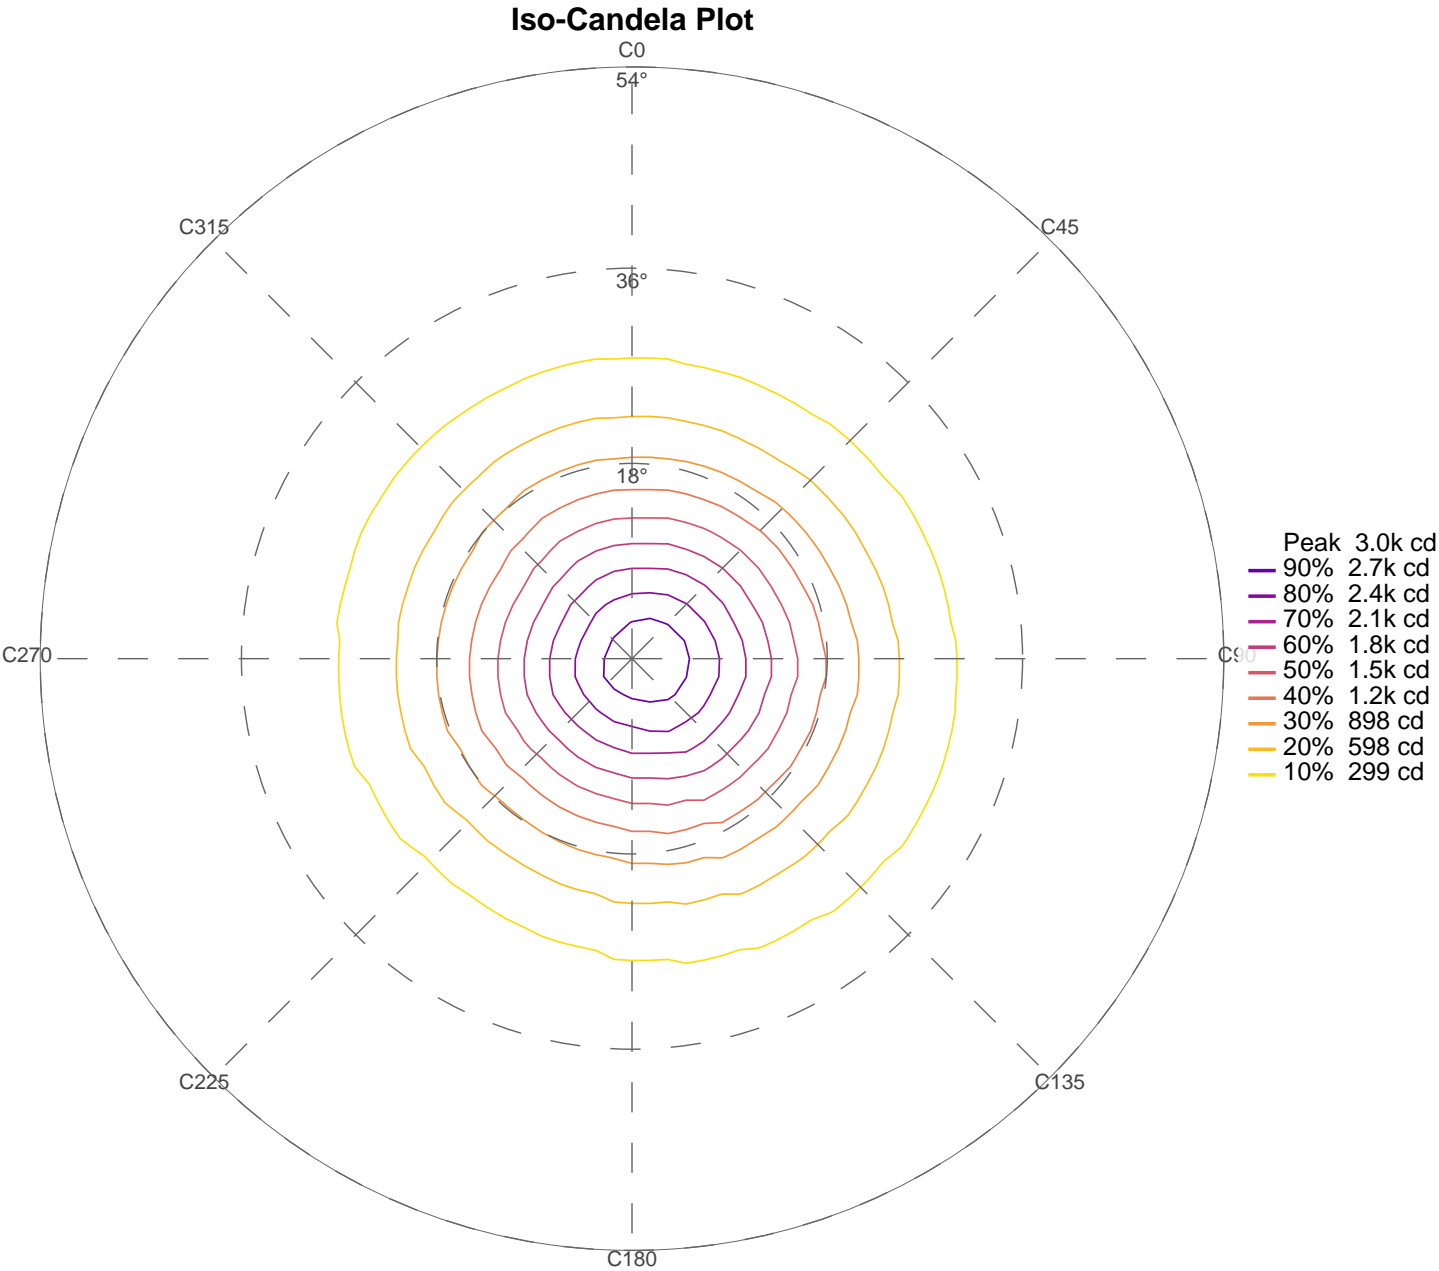


Settings


Distance unit	Meters (m)
Light unit	Lux (lx)
Spread mode	Fixture count
C-Plane	All C-Planes
Output Height	1.6 m
Floor X	5.0 m
Floor Y	5.0 m
Fixture grid	1 x 1 (1)
Wall dist X	0.30 m
Wall dist Y	0.30 m

Results


Peak	161.9 lx
Average	17.5 lx
Min	0.0 lx
Result grid	6 x 6 @ 1.0 m

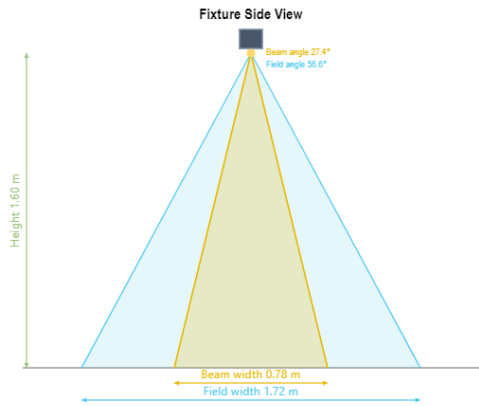

Iso-Illuminance

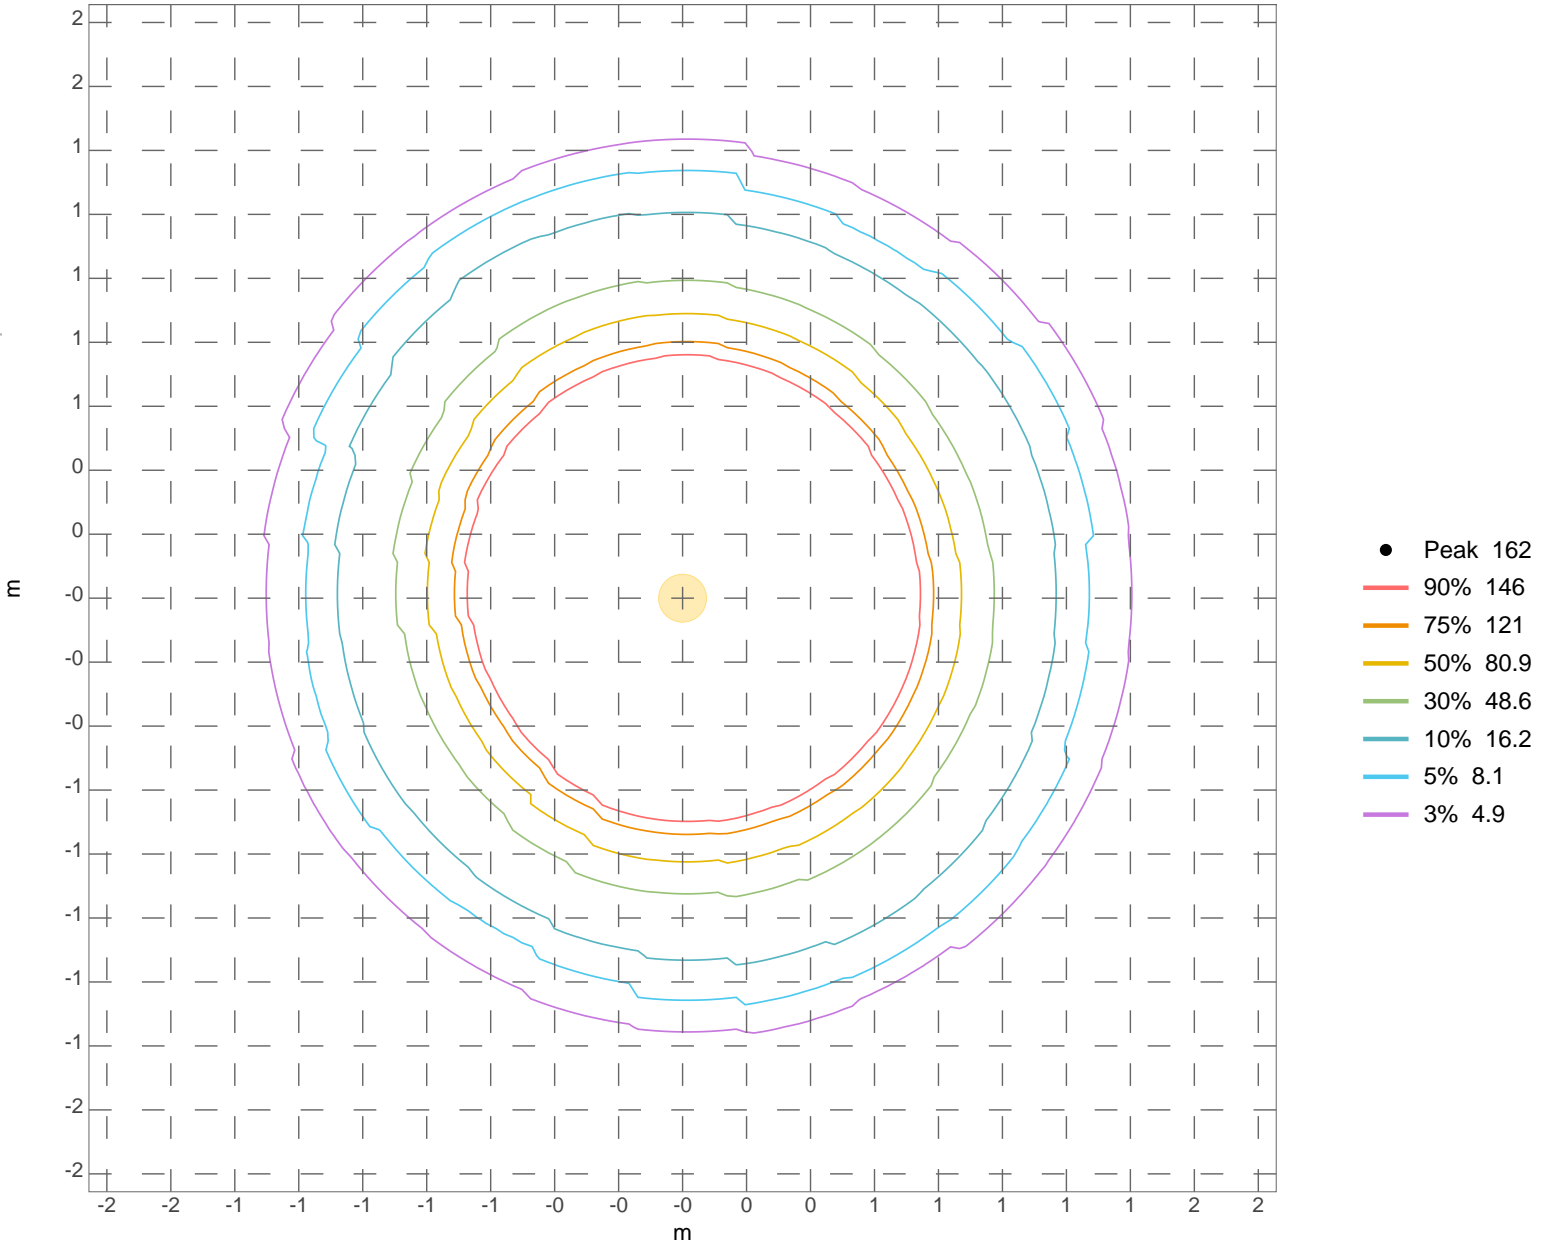

Beam Intensity

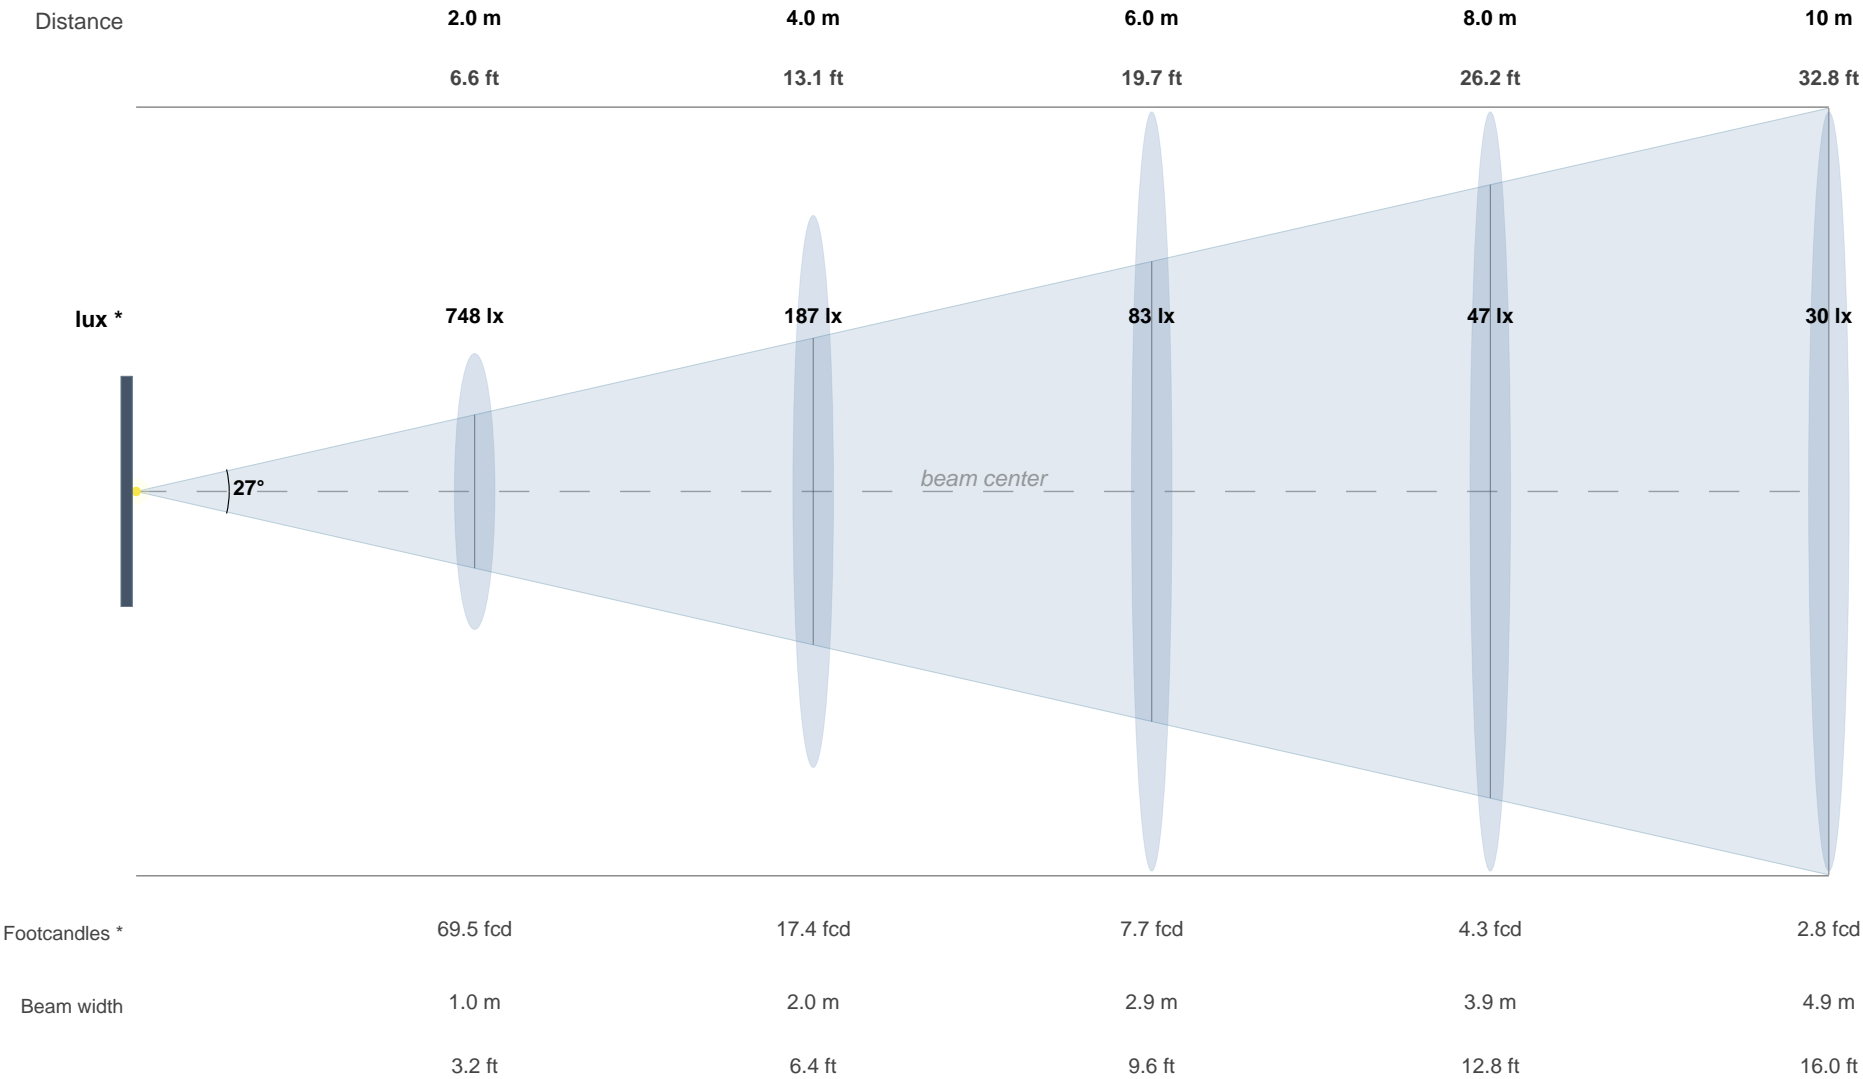

\* at beam centre