



Fixture model
2inspire 200 Narrow 5600K

Field: 42°

Beam: 19°

Magnification (mf): 0.34 x

Candelas: 8050 Cd

Lumens: 1510 lm


Watts: 30 w

Lumen/w: 51.1 lm/w

CRI Ra: 94

TM-30 Rf / Rg: 93 / 105

Duv: 0

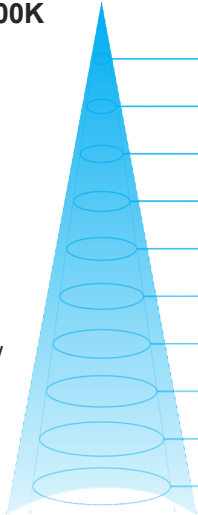

Fixture photometric table

Throw Distance		Field Spread		Beam Spread		Full On	
m	ft	m	ft	m	ft	Lux	Footcandle
1.00 m	3.3 ft	0.8 m	2.5 ft	0.3 m	1.1 ft	8050 lx	748 fc
1.53 m	5.0 ft	1.2 m	3.9 ft	0.5 m	1.7 ft	3439 lx	319 fc
3.05 m	10.0 ft	2.3 m	7.7 ft	1.0 m	3.4 ft	865 lx	80 fc
3.95 m	13.0 ft	3.0 m	9.9 ft	1.3 m	4.4 ft	516 lx	48 fc
4.56 m	15.0 ft	3.5 m	11.5 ft	1.5 m	5.0 ft	387 lx	36 fc
6.10 m	20.0 ft	4.7 m	15.4 ft	2.1 m	6.7 ft	216 lx	20 fc
6.85 m	22.5 ft	5.3 m	17.3 ft	2.3 m	7.6 ft	172 lx	16 fc
7.63 m	25.0 ft	5.9 m	19.2 ft	2.6 m	8.4 ft	138 lx	13 fc
9.15 m	30.0 ft	7.0 m	23.0 ft	3.1 m	10.1 ft	96 lx	9 fc
10.07 m	33.0 ft	7.7 m	25.4 ft	3.4 m	11.1 ft	79 lx	7 fc



Fixture model
2inspire 200 Medium 5600K

Field: 84°

Beam: 40°

Magnification (mf): 0.73 x

Candelas: 2170 Cd

Lumens: 1480 lm


Watts: 30 w

Lumen/w: 50.0 lm/w

CRI Ra: 94

TM-30 Rf / Rg: 93 / 105

Duv: 0

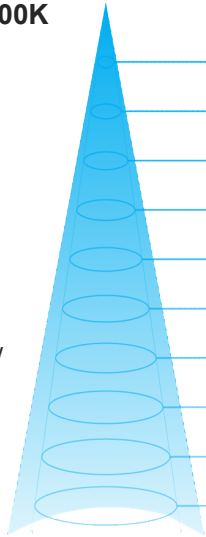

Fixture photometric table

Throw Distance		Field Spread		Beam Spread		Full On	
m	ft	m	ft	m	ft	Lux	Footcandle
1.00 m	3.3 ft	1.8 m	5.9 ft	0.7 m	2.4 ft	2170 lx	202 fc
1.53 m	5.0 ft	2.8 m	9.0 ft	1.1 m	3.7 ft	927 lx	86 fc
3.05 m	10.0 ft	5.5 m	18.0 ft	2.2 m	7.3 ft	233 lx	22 fc
3.95 m	13.0 ft	7.1 m	23.3 ft	2.9 m	9.4 ft	139 lx	13 fc
4.56 m	15.0 ft	8.2 m	26.9 ft	3.3 m	10.9 ft	104 lx	10 fc
6.10 m	20.0 ft	11.0 m	36.0 ft	4.4 m	14.6 ft	58 lx	5 fc
6.85 m	22.5 ft	12.3 m	40.5 ft	5.0 m	16.4 ft	46 lx	4 fc
7.63 m	25.0 ft	13.7 m	45.1 ft	5.6 m	18.2 ft	37 lx	3 fc
9.15 m	30.0 ft	16.5 m	54.1 ft	6.7 m	21.9 ft	26 lx	2 fc
10.07 m	33.0 ft	18.1 m	59.5 ft	7.3 m	24.0 ft	21 lx	2 fc



Fixture model
2inspire 200 Wide 5600K

Field: 130°

Beam: 47°

Magnification (mf): 0.87 x

Candelas: 630 Cd

Lumens: 700 lm


Watts: 30 w

Lumen/w: 23.7 lm/w

CRI Ra: 94

TM-30 Rf / Rg: 93 / 105

Duv: 0

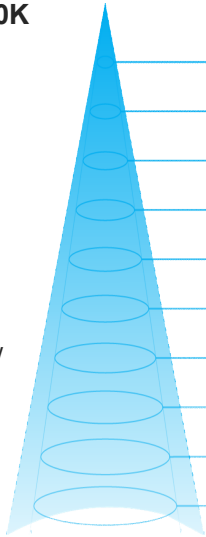

Fixture photometric table

Throw Distance		Field Spread		Beam Spread		Full On	
m	ft	m	ft	m	ft	Lux	Footcandle
1.00 m	3.3 ft	4.3 m	14.1 ft	0.9 m	2.9 ft	630 lx	59 fc
1.53 m	5.0 ft	6.6 m	21.5 ft	1.3 m	4.4 ft	269 lx	25 fc
3.05 m	10.0 ft	13.1 m	42.9 ft	2.7 m	8.7 ft	68 lx	6 fc
3.95 m	13.0 ft	16.9 m	55.6 ft	3.4 m	11.3 ft	40 lx	4 fc
4.56 m	15.0 ft	19.6 m	64.2 ft	4.0 m	13.0 ft	30 lx	3 fc
6.10 m	20.0 ft	26.2 m	85.8 ft	5.3 m	17.4 ft	17 lx	2 fc
6.85 m	22.5 ft	29.4 m	96.4 ft	6.0 m	19.5 ft	13 lx	1 fc
7.63 m	25.0 ft	32.7 m	107.4 ft	6.6 m	21.8 ft	11 lx	1 fc
9.15 m	30.0 ft	39.2 m	128.8 ft	8.0 m	26.1 ft	8 lx	1 fc
10.07 m	33.0 ft	43.2 m	141.7 ft	8.8 m	28.7 ft	6 lx	1 fc



Fixture model
2inspire 200 Extra Large 5600K

Field: 145°

Beam: 46°

Magnification (mf): 0.85 x

Candelas: 530 Cd

Lumens: 680 lm


Watts: 30 w

Lumen/w: 22.9 lm/w

CRI Ra: 94

TM-30 Rf / Rg: 93 / 105

Duv: 0

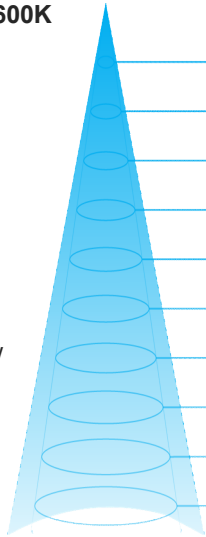

Fixture photometric table

Throw Distance		Field Spread		Beam Spread		Full On	
m	ft	m	ft	m	ft	Lux	Footcandle
1.00 m	3.3 ft	6.3 m	20.8 ft	0.8 m	2.8 ft	530 lx	49 fc
1.53 m	5.0 ft	9.7 m	31.8 ft	1.3 m	4.3 ft	226 lx	21 fc
3.05 m	10.0 ft	19.3 m	63.5 ft	2.6 m	8.5 ft	57 lx	5 fc
3.95 m	13.0 ft	25.1 m	82.2 ft	3.4 m	11.0 ft	34 lx	3 fc
4.56 m	15.0 ft	28.9 m	94.9 ft	3.9 m	12.7 ft	25 lx	2 fc
6.10 m	20.0 ft	38.7 m	126.9 ft	5.2 m	17.0 ft	14 lx	1 fc
6.85 m	22.5 ft	43.5 m	142.6 ft	5.8 m	19.1 ft	11 lx	1 fc
7.63 m	25.0 ft	48.4 m	158.8 ft	6.5 m	21.3 ft	9 lx	1 fc
9.15 m	30.0 ft	58.0 m	190.4 ft	7.8 m	25.5 ft	6 lx	1 fc
10.07 m	33.0 ft	63.9 m	209.6 ft	8.5 m	28.0 ft	5 lx	0 fc



Fixture model
2inspire 200 Assymetrical 5600K

Field: 34°

Beam: 21°

Magnification (mf): 0.37 x

Candelas: 2330 Cd

Lumens: 860 lm


Watts: 30 w

Lumen/w: 29.0 lm/w

CRI Ra: 94

TM-30 Rf / Rg: 93 / 105

Duv: 0

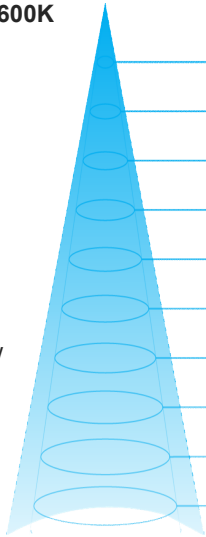

Fixture photometric table

Throw Distance		Field Spread		Beam Spread		Full On	
m	ft	m	ft	m	ft	Lux	Footcandle
1.00 m	3.3 ft	0.6 m	2.0 ft	0.4 m	1.2 ft	2330 lx	216 fc
1.53 m	5.0 ft	0.9 m	3.1 ft	0.6 m	1.9 ft	995 lx	92 fc
3.05 m	10.0 ft	1.9 m	6.1 ft	1.1 m	3.7 ft	250 lx	23 fc
3.95 m	13.0 ft	2.4 m	7.9 ft	1.5 m	4.8 ft	149 lx	14 fc
4.56 m	15.0 ft	2.8 m	9.1 ft	1.7 m	5.5 ft	112 lx	10 fc
6.10 m	20.0 ft	3.7 m	12.2 ft	2.3 m	7.4 ft	63 lx	6 fc
6.85 m	22.5 ft	4.2 m	13.7 ft	2.5 m	8.3 ft	50 lx	5 fc
7.63 m	25.0 ft	4.7 m	15.3 ft	2.8 m	9.3 ft	40 lx	4 fc
9.15 m	30.0 ft	5.6 m	18.4 ft	3.4 m	11.1 ft	28 lx	3 fc
10.07 m	33.0 ft	6.2 m	20.2 ft	3.7 m	12.2 ft	23 lx	2 fc



Fixture model
2inspire 200 Narrow 2400K

Field: 120°

Beam: 19°

Magnification (mf): 0.34 x

Candelas: 5950 Cd

Lumens: 1110 lm


Watts: 30 w

Lumen/w: 37.5 lm/w

CRI Ra: 64

TM-30 Rf / Rg: 73 / 111

Duv: 0

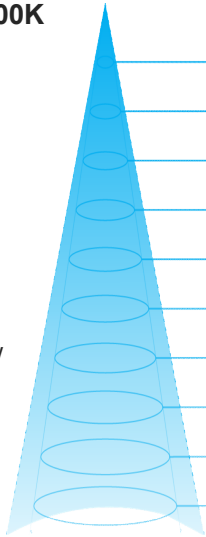

Fixture photometric table

Throw Distance		Field Spread		Beam Spread		Full On	
m	ft	m	ft	m	ft	Lux	Footcandle
1.00 m	3.3 ft	3.5 m	11.4 ft	0.3 m	1.1 ft	5950 lx	553 fc
1.53 m	5.0 ft	5.3 m	17.4 ft	0.5 m	1.7 ft	2542 lx	236 fc
3.05 m	10.0 ft	10.6 m	34.7 ft	1.0 m	3.4 ft	640 lx	59 fc
3.95 m	13.0 ft	13.7 m	44.9 ft	1.3 m	4.4 ft	381 lx	35 fc
4.56 m	15.0 ft	15.8 m	51.8 ft	1.5 m	5.0 ft	286 lx	27 fc
6.10 m	20.0 ft	21.1 m	69.3 ft	2.1 m	6.7 ft	160 lx	15 fc
6.85 m	22.5 ft	23.7 m	77.9 ft	2.3 m	7.6 ft	127 lx	12 fc
7.63 m	25.0 ft	26.4 m	86.7 ft	2.6 m	8.4 ft	102 lx	9 fc
9.15 m	30.0 ft	31.7 m	104.0 ft	3.1 m	10.1 ft	71 lx	7 fc
10.07 m	33.0 ft	34.9 m	114.4 ft	3.4 m	11.1 ft	59 lx	5 fc



Fixture model
2inspire 200 Narrow 3200K

Field: 42°

Beam: 19°

Magnification (mf): 0.34 x

Candelas: 6950 Cd

Lumens: 1300 lm


Watts: 30 w

Lumen/w: 43.7 lm/w

CRI Ra: 81

TM-30 Rf / Rg: 86 / 109

Duv: 0

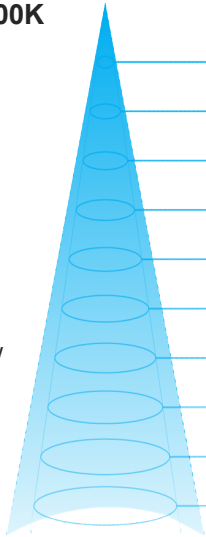

Fixture photometric table

Throw Distance		Field Spread		Beam Spread		Full On	
m	ft	m	ft	m	ft	Lux	Footcandle
1.00 m	3.3 ft	0.8 m	2.5 ft	0.3 m	1.1 ft	6950 lx	646 fc
1.53 m	5.0 ft	1.2 m	3.9 ft	0.5 m	1.7 ft	2969 lx	276 fc
3.05 m	10.0 ft	2.3 m	7.7 ft	1.0 m	3.4 ft	747 lx	69 fc
3.95 m	13.0 ft	3.0 m	9.9 ft	1.3 m	4.4 ft	445 lx	41 fc
4.56 m	15.0 ft	3.5 m	11.5 ft	1.5 m	5.0 ft	334 lx	31 fc
6.10 m	20.0 ft	4.7 m	15.4 ft	2.1 m	6.7 ft	187 lx	17 fc
6.85 m	22.5 ft	5.3 m	17.3 ft	2.3 m	7.6 ft	148 lx	14 fc
7.63 m	25.0 ft	5.9 m	19.2 ft	2.6 m	8.4 ft	119 lx	11 fc
9.15 m	30.0 ft	7.0 m	23.0 ft	3.1 m	10.1 ft	83 lx	8 fc
10.07 m	33.0 ft	7.7 m	25.4 ft	3.4 m	11.1 ft	69 lx	6 fc



Fixture model
2inspire 200 Narrow 4800K

Field: 42°

Beam: 19°

Magnification (mf): 0.34 x

Candelas: 7860 Cd

Lumens: 1480 lm


Watts: 30 w

Lumen/w: 49.8 lm/w

CRI Ra: 95

TM-30 Rf / Rg: 93 / 104

Duv: 0

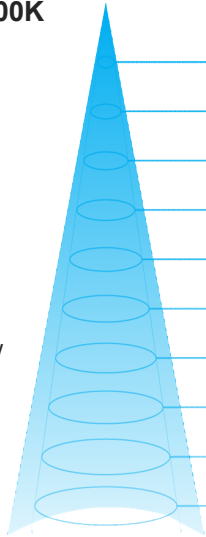

Fixture photometric table

Throw Distance		Field Spread		Beam Spread		Full On	
m	ft	m	ft	m	ft	Lux	Footcandle
1.00 m	3.3 ft	0.8 m	2.5 ft	0.3 m	1.1 ft	7860 lx	730 fc
1.53 m	5.0 ft	1.2 m	3.9 ft	0.5 m	1.7 ft	3358 lx	312 fc
3.05 m	10.0 ft	2.3 m	7.7 ft	1.0 m	3.4 ft	845 lx	78 fc
3.95 m	13.0 ft	3.0 m	9.9 ft	1.3 m	4.4 ft	504 lx	47 fc
4.56 m	15.0 ft	3.5 m	11.5 ft	1.5 m	5.0 ft	378 lx	35 fc
6.10 m	20.0 ft	4.7 m	15.4 ft	2.1 m	6.7 ft	211 lx	20 fc
6.85 m	22.5 ft	5.3 m	17.3 ft	2.3 m	7.6 ft	168 lx	16 fc
7.63 m	25.0 ft	5.9 m	19.2 ft	2.6 m	8.4 ft	135 lx	13 fc
9.15 m	30.0 ft	7.0 m	23.0 ft	3.1 m	10.1 ft	94 lx	9 fc
10.07 m	33.0 ft	7.7 m	25.4 ft	3.4 m	11.1 ft	78 lx	7 fc



Fixture model
2inspire 200 Narrow 5600K

Field: 42°

Beam: 19°

Magnification (mf): 0.34 x

Candelas: 8050 Cd

Lumens: 1510 lm


Watts: 30 w

Lumen/w: 51.1 lm/w

CRI Ra: 94

TM-30 Rf / Rg: 93 / 105

Duv: 0

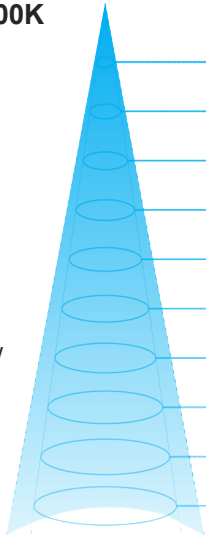

Fixture photometric table

Throw Distance		Field Spread		Beam Spread		Full On	
m	ft	m	ft	m	ft	Lux	Footcandle
1.00 m	3.3 ft	0.8 m	2.5 ft	0.3 m	1.1 ft	8050 lx	748 fc
1.53 m	5.0 ft	1.2 m	3.9 ft	0.5 m	1.7 ft	3439 lx	319 fc
3.05 m	10.0 ft	2.3 m	7.7 ft	1.0 m	3.4 ft	865 lx	80 fc
3.95 m	13.0 ft	3.0 m	9.9 ft	1.3 m	4.4 ft	516 lx	48 fc
4.56 m	15.0 ft	3.5 m	11.5 ft	1.5 m	5.0 ft	387 lx	36 fc
6.10 m	20.0 ft	4.7 m	15.4 ft	2.1 m	6.7 ft	216 lx	20 fc
6.85 m	22.5 ft	5.3 m	17.3 ft	2.3 m	7.6 ft	172 lx	16 fc
7.63 m	25.0 ft	5.9 m	19.2 ft	2.6 m	8.4 ft	138 lx	13 fc
9.15 m	30.0 ft	7.0 m	23.0 ft	3.1 m	10.1 ft	96 lx	9 fc
10.07 m	33.0 ft	7.7 m	25.4 ft	3.4 m	11.1 ft	79 lx	7 fc



Chroma-Q®

Fixture model

2inspire 200 Narrow 6500K

Field: 42°

Beam: 19°

Magnification (mf): 0.34 x

Candelas: 7940 Cd

Lumens: 1490 lm


Watts: 30 w

Lumen/w: 50.0 lm/w

CRI Ra: 93

TM-30 Rf / Rg: 91 / 105

Duv: 0

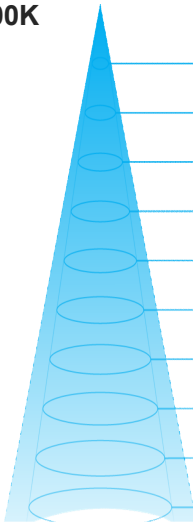

Fixture photometric table

Throw Distance		Field Spread		Beam Spread		Full On	
m	ft	m	ft	m	ft	Lux	Footcandle
1.00 m	3.3 ft	0.8 m	2.5 ft	0.3 m	1.1 ft	7940 lx	738 fc
1.53 m	5.0 ft	1.2 m	3.9 ft	0.5 m	1.7 ft	3392 lx	315 fc
3.05 m	10.0 ft	2.3 m	7.7 ft	1.0 m	3.4 ft	854 lx	79 fc
3.95 m	13.0 ft	3.0 m	9.9 ft	1.3 m	4.4 ft	509 lx	47 fc
4.56 m	15.0 ft	3.5 m	11.5 ft	1.5 m	5.0 ft	382 lx	35 fc
6.10 m	20.0 ft	4.7 m	15.4 ft	2.1 m	6.7 ft	213 lx	20 fc
6.85 m	22.5 ft	5.3 m	17.3 ft	2.3 m	7.6 ft	169 lx	16 fc
7.63 m	25.0 ft	5.9 m	19.2 ft	2.6 m	8.4 ft	136 lx	13 fc
9.15 m	30.0 ft	7.0 m	23.0 ft	3.1 m	10.1 ft	95 lx	9 fc
10.07 m	33.0 ft	7.7 m	25.4 ft	3.4 m	11.1 ft	78 lx	7 fc