



Chroma-Q®

### Fixture photometric table

**Fixture model**  
**2inspire 200 Narrow 2400K**

**Field:** 42°

**Beam:** 19°

**Magnification (mf):** 0.34 x

**Candelas:** 5900 Cd

**Lumens:** 1100 lm


**Watts:** 30 w

**Lumen/w:** 200.4 lm/w

**CRI Ra:** 64

**TM-30 Rf / Rg:** 73 / 111

**Duv:** -0.0065

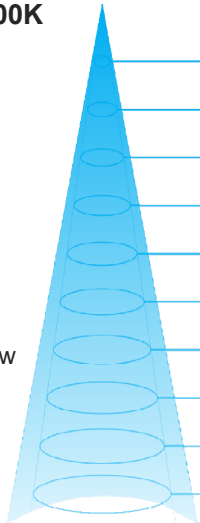


Throw Distance		Field Spread		Beam Spread		Full On	
m	ft	m	ft	m	ft	Lux	Footcandle
1.00 m	3.3 ft	0.8 m	2.5 ft	0.3 m	1.1 ft	5900 lx	548 fc
1.53 m	5.0 ft	1.2 m	3.9 ft	0.5 m	1.7 ft	2520 lx	234 fc
3.05 m	10.0 ft	2.3 m	7.7 ft	1.0 m	3.4 ft	634 lx	59 fc
3.95 m	13.0 ft	3.0 m	9.9 ft	1.3 m	4.4 ft	378 lx	35 fc
4.56 m	15.0 ft	3.5 m	11.5 ft	1.5 m	5.0 ft	284 lx	26 fc
6.10 m	20.0 ft	4.7 m	15.4 ft	2.1 m	6.7 ft	159 lx	15 fc
6.85 m	22.5 ft	5.3 m	17.3 ft	2.3 m	7.6 ft	126 lx	12 fc
7.63 m	25.0 ft	5.9 m	19.2 ft	2.6 m	8.4 ft	101 lx	9 fc
9.15 m	30.0 ft	7.0 m	23.0 ft	3.1 m	10.1 ft	70 lx	7 fc
10.07 m	33.0 ft	7.7 m	25.4 ft	3.4 m	11.1 ft	58 lx	5 fc



**Chroma-Q**

**Fixture photometric table**

**Fixture model**  
**2inspire 200 Narrow 3200K**  
**Field:** 42°  
**Beam:** 19°  
**Magnification (mf):** 0.34 x  
**Candelas:** 6900 Cd  
**Lumens:** 1300 lm  
**Watts:** 30 w  
**Lumen/w:** 232.7 lm/w  
**CRI Ra:** 81  
**TM-30 Rf / Rg:** 86 / 109  
**Duv:** -0.0065

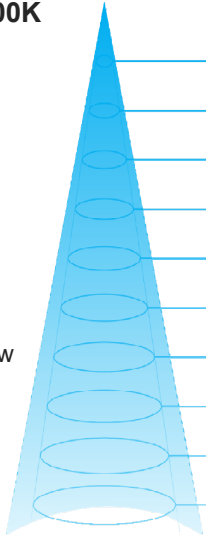


Throw Distance		Field Spread		Beam Spread		Full On	
m	ft	m	ft	m	ft	Lux	Footcandle
1.00 m	3.3 ft	0.8 m	2.5 ft	0.3 m	1.1 ft	6900 lx	641 fc
1.53 m	5.0 ft	1.2 m	3.9 ft	0.5 m	1.7 ft	2948 lx	274 fc
3.05 m	10.0 ft	2.3 m	7.7 ft	1.0 m	3.4 ft	742 lx	69 fc
3.95 m	13.0 ft	3.0 m	9.9 ft	1.3 m	4.4 ft	442 lx	41 fc
4.56 m	15.0 ft	3.5 m	11.5 ft	1.5 m	5.0 ft	332 lx	31 fc
6.10 m	20.0 ft	4.7 m	15.4 ft	2.1 m	6.7 ft	185 lx	17 fc
6.85 m	22.5 ft	5.3 m	17.3 ft	2.3 m	7.6 ft	147 lx	14 fc
7.63 m	25.0 ft	5.9 m	19.2 ft	2.6 m	8.4 ft	119 lx	11 fc
9.15 m	30.0 ft	7.0 m	23.0 ft	3.1 m	10.1 ft	82 lx	8 fc
10.07 m	33.0 ft	7.7 m	25.4 ft	3.4 m	11.1 ft	68 lx	6 fc



**Chroma-Q**

**Fixture photometric table**

**Fixture model**  
**2inspire 200 Narrow 4800K**  
**Field:** 42°  
**Beam:** 19°  
**Magnification (mf):** 0.34 x  
**Candelas:** 7800 Cd  
**Lumens:** 1400 lm  
**Watts:** 30 w  
**Lumen/w:** 264.6 lm/w  
**CRI Ra:** 95  
**TM-30 Rf / Rg:** 93 / 104  
**Duv:** -0.0065

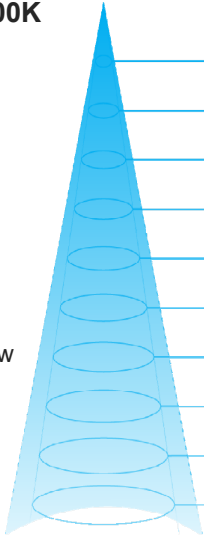


Throw Distance		Field Spread		Beam Spread		Full On	
m	ft	m	ft	m	ft	Lux	Footcandle
1.00 m	3.3 ft	0.8 m	2.5 ft	0.3 m	1.1 ft	7800 lx	725 fc
1.53 m	5.0 ft	1.2 m	3.9 ft	0.5 m	1.7 ft	3332 lx	310 fc
3.05 m	10.0 ft	2.3 m	7.7 ft	1.0 m	3.4 ft	838 lx	78 fc
3.95 m	13.0 ft	3.0 m	9.9 ft	1.3 m	4.4 ft	500 lx	46 fc
4.56 m	15.0 ft	3.5 m	11.5 ft	1.5 m	5.0 ft	375 lx	35 fc
6.10 m	20.0 ft	4.7 m	15.4 ft	2.1 m	6.7 ft	210 lx	19 fc
6.85 m	22.5 ft	5.3 m	17.3 ft	2.3 m	7.6 ft	166 lx	15 fc
7.63 m	25.0 ft	5.9 m	19.2 ft	2.6 m	8.4 ft	134 lx	12 fc
9.15 m	30.0 ft	7.0 m	23.0 ft	3.1 m	10.1 ft	93 lx	9 fc
10.07 m	33.0 ft	7.7 m	25.4 ft	3.4 m	11.1 ft	77 lx	7 fc



**Chroma-Q**

**Fixture photometric table**

**Fixture model**  
**2inspire 200 Narrow 5600K**  
**Field:** 42°  
**Beam:** 19°  
**Magnification (mf):** 0.34 x  
**Candelas:** 8000 Cd  
**Lumens:** 1500 lm  
**Watts:** 30 w  
**Lumen/w:** 271.1 lm/w  
**CRI Ra:** 94  
**TM-30 Rf / Rg:** 93 / 105  
**Duv:** -0.0065

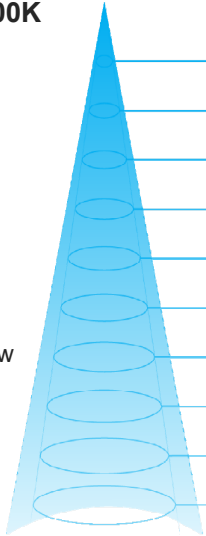

Throw Distance		Field Spread		Beam Spread		Full On	
m	ft	m	ft	m	ft	Lux	Footcandle
1.00 m	3.3 ft	0.8 m	2.5 ft	0.3 m	1.1 ft	8000 lx	743 fc
1.53 m	5.0 ft	1.2 m	3.9 ft	0.5 m	1.7 ft	3417 lx	317 fc
3.05 m	10.0 ft	2.3 m	7.7 ft	1.0 m	3.4 ft	860 lx	80 fc
3.95 m	13.0 ft	3.0 m	9.9 ft	1.3 m	4.4 ft	513 lx	48 fc
4.56 m	15.0 ft	3.5 m	11.5 ft	1.5 m	5.0 ft	385 lx	36 fc
6.10 m	20.0 ft	4.7 m	15.4 ft	2.1 m	6.7 ft	215 lx	20 fc
6.85 m	22.5 ft	5.3 m	17.3 ft	2.3 m	7.6 ft	170 lx	16 fc
7.63 m	25.0 ft	5.9 m	19.2 ft	2.6 m	8.4 ft	137 lx	13 fc
9.15 m	30.0 ft	7.0 m	23.0 ft	3.1 m	10.1 ft	96 lx	9 fc
10.07 m	33.0 ft	7.7 m	25.4 ft	3.4 m	11.1 ft	79 lx	7 fc



**Chroma-Q**

**Fixture model**  
**2inspire 200 Narrow 6500K**

**Field:** 42°

**Beam:** 19°

**Magnification (mf):** 0.34 x

**Candelas:** 7900 Cd

**Lumens:** 1400 lm


**Watts:** 30 w

**Lumen/w:** 265.6 lm/w

**CRI Ra:** 93

**TM-30 Rf / Rg:** 91 / 105

**Duv:** -0.0065

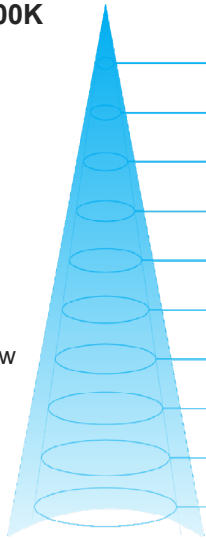

**Fixture photometric table**

Throw Distance		Field Spread		Beam Spread		Full On	
m	ft	m	ft	m	ft	Lux	Footcandle
1.00 m	3.3 ft	0.8 m	2.5 ft	0.3 m	1.1 ft	7900 lx	734 fc
1.53 m	5.0 ft	1.2 m	3.9 ft	0.5 m	1.7 ft	3375 lx	314 fc
3.05 m	10.0 ft	2.3 m	7.7 ft	1.0 m	3.4 ft	849 lx	79 fc
3.95 m	13.0 ft	3.0 m	9.9 ft	1.3 m	4.4 ft	506 lx	47 fc
4.56 m	15.0 ft	3.5 m	11.5 ft	1.5 m	5.0 ft	380 lx	35 fc
6.10 m	20.0 ft	4.7 m	15.4 ft	2.1 m	6.7 ft	212 lx	20 fc
6.85 m	22.5 ft	5.3 m	17.3 ft	2.3 m	7.6 ft	168 lx	16 fc
7.63 m	25.0 ft	5.9 m	19.2 ft	2.6 m	8.4 ft	136 lx	13 fc
9.15 m	30.0 ft	7.0 m	23.0 ft	3.1 m	10.1 ft	94 lx	9 fc
10.07 m	33.0 ft	7.7 m	25.4 ft	3.4 m	11.1 ft	78 lx	7 fc