



**Chroma-Q™**  
BRILLIANT SOLUTIONS

**Specification Sheet - Version: 1.3**

**Chroma-Q™ Magic Box™**

**8 Way DMX Buffer**

**Part No: CHMBDMX8**

**DESCRIPTION**

The device shall be a fault tolerant, self healing DMX buffer designed to fully isolate all outputs from each other.


The device shall fit customised front of house racks.

**FEATURES**

- Fault tolerant, self healing DMX buffer designed to fully isolate all outputs from each other.
- Supplied with 8x5 pin XLR connectors.
- Each output is separately generated and boosted from the original DMX signal.
- Through connector and termination switch.
- Unique Magic Box interlocking enclosure facilitates rack mounting when used in pairs and truss mounting via captive nut insert.
- Designed for customised front of house racks.
- Built-in termination.

**OVERALL SPECIFICATIONS**

Net dimensions:	Width (A): 220mm / 8.6"
	Height (B): 88mm / 3.5"
	Depth (C): 280mm / 11"
Net weight:	2.7kg / 6.0lbs
Shipping dimensions:	Width: 250mm / 9.8"
	Height: 125mm / 4.9"
	Depth: 300mm / 11.8"
Shipping weight:	3.2kg / 7.1lbs
Colour:	Black
Power:	100-240V, 50-60Hz, 15W
Power connector:	IEC chassis male
DMX connector In:	XLR5
DMX connector Out:	8 x XLR5
DMX connector Thru:	XLR5

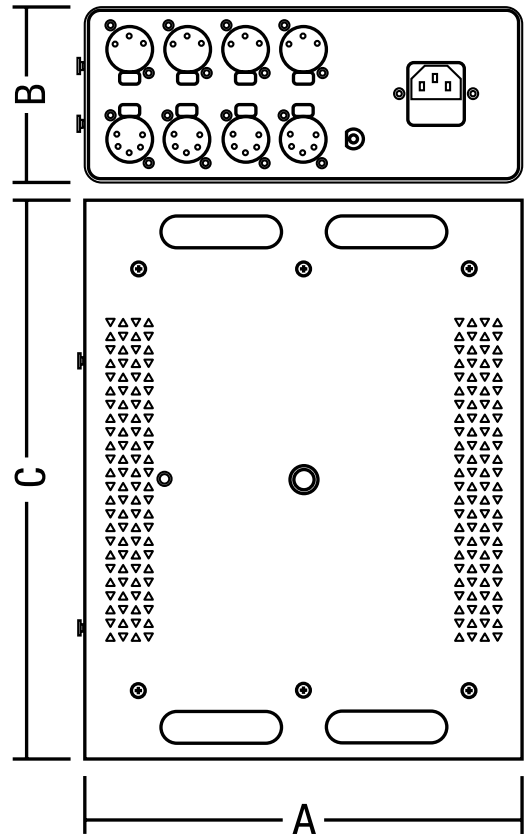

**ORDERING INFORMATION**

CHMBDMX8: Chroma-Q Magic Box 8-Way DMX Buffer

**ACCESSORIES**

- MBEAR: Chroma-Q Magic Box pair of rack ears
- MBDMXAB: Chroma-Q Magic Box 8>4 DMX A/B Switch
- MBPS12: Chroma-Q Magic Box PS12 Power Supply