





Fixture photometric table

Fixture model
Space Force Octo 2800K
Field: 160°
Beam: 80°
Magnification (mf): 1.68 x
Candelas: 13000 Cd
Lumens: 21800 lm
Watts: 333 w
Lumen/w: 39.1 lm/w
CRI Ra: 97
TM-30 Rf / Rg: 93 / 98
Duv: 0.0024

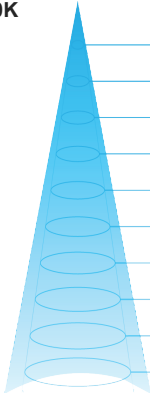


Throw Distance		Field Spread		Beam Spread		Full On	
m	ft	m	ft	m	ft	Lux	Footcandle
1.00 m	3.3 ft	11.3 m	37.2 ft	1.7 m	5.5 ft	13000 lx	1208 fc
1.53 m	5.0 ft	17.4 m	56.9 ft	2.6 m	8.4 ft	5553 lx	516 fc
3.05 m	10.0 ft	34.6 m	113.5 ft	5.1 m	16.8 ft	1397 lx	130 fc
3.95 m	13.0 ft	44.8 m	147.0 ft	6.6 m	21.7 ft	833 lx	77 fc
4.56 m	15.0 ft	51.7 m	169.7 ft	7.7 m	25.1 ft	625 lx	58 fc
6.10 m	20.0 ft	69.2 m	227.0 ft	10.2 m	33.6 ft	349 lx	32 fc
6.85 m	22.5 ft	77.7 m	254.9 ft	11.5 m	37.7 ft	277 lx	26 fc
7.63 m	25.0 ft	86.5 m	283.9 ft	12.8 m	42.0 ft	223 lx	21 fc
9.15 m	30.0 ft	103.8 m	340.5 ft	15.4 m	50.4 ft	155 lx	14 fc
10.07 m	33.0 ft	114.2 m	374.7 ft	16.9 m	55.4 ft	128 lx	12 fc

Fixture model
Space Force Octo 3200K
Field: 160°
Beam: 80°
Magnification (mf): 1.68 x
Candelas: 14800 Cd
Lumens: 24900 lm
Watts: 333 w
Lumen/w: 44.5 lm/w
CRI Ra: 95
TM-30 Rf / Rg: 92 / 103
Duv: -0.0023

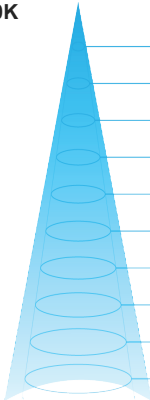

Throw Distance		Field Spread		Beam Spread		Full On	
m	ft	m	ft	m	ft	Lux	Footcandle
1.00 m	3.3 ft	11.3 m	37.2 ft	1.7 m	5.5 ft	14800 lx	1375 fc
1.53 m	5.0 ft	17.4 m	56.9 ft	2.6 m	8.4 ft	6322 lx	587 fc
3.05 m	10.0 ft	34.6 m	113.5 ft	5.1 m	16.8 ft	1591 lx	148 fc
3.95 m	13.0 ft	44.8 m	147.0 ft	6.6 m	21.7 ft	949 lx	88 fc
4.56 m	15.0 ft	51.7 m	169.7 ft	7.7 m	25.1 ft	712 lx	66 fc
6.10 m	20.0 ft	69.2 m	227.0 ft	10.2 m	33.6 ft	398 lx	37 fc
6.85 m	22.5 ft	77.7 m	254.9 ft	11.5 m	37.7 ft	315 lx	29 fc
7.63 m	25.0 ft	86.5 m	283.9 ft	12.8 m	42.0 ft	254 lx	24 fc
9.15 m	30.0 ft	103.8 m	340.5 ft	15.4 m	50.4 ft	177 lx	16 fc
10.07 m	33.0 ft	114.2 m	374.7 ft	16.9 m	55.4 ft	146 lx	14 fc

Fixture model
Space Force Octo 4400K
Field: 160°
Beam: 80°
Magnification (mf): 1.68 x
Candelas: 14600 Cd
Lumens: 24600 lm
Watts: 333 w
Lumen/w: 43.9 lm/w
CRI Ra: 92
TM-30 Rf / Rg: 88 / 102
Duv: -0.0038

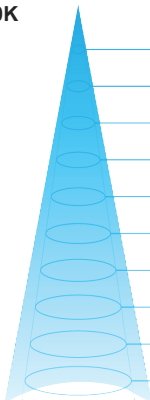


Throw Distance		Field Spread		Beam Spread		Full On	
m	ft	m	ft	m	ft	Lux	Footcandle
1.00 m	3.3 ft	11.3 m	37.2 ft	1.7 m	5.5 ft	14600 lx	1356 fc
1.53 m	5.0 ft	17.4 m	56.9 ft	2.6 m	8.4 ft	6237 lx	579 fc
3.05 m	10.0 ft	34.6 m	113.5 ft	5.1 m	16.8 ft	1569 lx	146 fc
3.95 m	13.0 ft	44.8 m	147.0 ft	6.6 m	21.7 ft	936 lx	87 fc
4.56 m	15.0 ft	51.7 m	169.7 ft	7.7 m	25.1 ft	702 lx	65 fc
6.10 m	20.0 ft	69.2 m	227.0 ft	10.2 m	33.6 ft	392 lx	36 fc
6.85 m	22.5 ft	77.7 m	254.9 ft	11.5 m	37.7 ft	311 lx	29 fc
7.63 m	25.0 ft	86.5 m	283.9 ft	12.8 m	42.0 ft	251 lx	23 fc
9.15 m	30.0 ft	103.8 m	340.5 ft	15.4 m	50.4 ft	174 lx	16 fc
10.07 m	33.0 ft	114.2 m	374.7 ft	16.9 m	55.4 ft	144 lx	13 fc

Fixture photometric table

Fixture model
Space Force Octo 5600K


Field: 160°
Beam: 80°
Magnification (mf): 1.68 x
Candelas: 15900 Cd
Lumens: 26800 lm
Watts: 333 w
Lumen/w: 47.9 lm/w
CRI Ra: 88
TM-30 Rf / Rg: 85 / 101
Duv: -0.0015

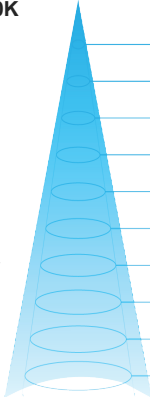

Throw Distance		Field Spread		Beam Spread		Full On	
m	ft	m	ft	m	ft	Lux	Footcandle
1.00 m	3.3 ft	11.3 m	37.2 ft	1.7 m	5.5 ft	15900 lx	1477 fc
1.53 m	5.0 ft	17.4 m	56.9 ft	2.6 m	8.4 ft	6792 lx	631 fc
3.05 m	10.0 ft	34.6 m	113.5 ft	5.1 m	16.8 ft	1709 lx	159 fc
3.95 m	13.0 ft	44.8 m	147.0 ft	6.6 m	21.7 ft	1019 lx	95 fc
4.56 m	15.0 ft	51.7 m	169.7 ft	7.7 m	25.1 ft	765 lx	71 fc
6.10 m	20.0 ft	69.2 m	227.0 ft	10.2 m	33.6 ft	427 lx	40 fc
6.85 m	22.5 ft	77.7 m	254.9 ft	11.5 m	37.7 ft	339 lx	31 fc
7.63 m	25.0 ft	86.5 m	283.9 ft	12.8 m	42.0 ft	273 lx	25 fc
9.15 m	30.0 ft	103.8 m	340.5 ft	15.4 m	50.4 ft	190 lx	18 fc
10.07 m	33.0 ft	114.2 m	374.7 ft	16.9 m	55.4 ft	157 lx	15 fc

Fixture model
Space Force Octo 6000K

Field: 160°
Beam: 80°
Magnification (mf): 1.68 x
Candelas: 15500 Cd
Lumens: 26200 lm
Watts: 333 w
Lumen/w: 46.8 lm/w
CRI Ra: 87
TM-30 Rf / Rg: 84 / 100
Duv: 0.0002

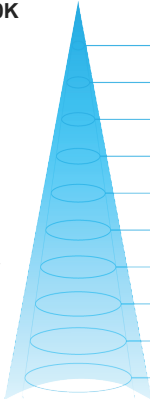

Throw Distance		Field Spread		Beam Spread		Full On	
m	ft	m	ft	m	ft	Lux	Footcandle
1.00 m	3.3 ft	11.3 m	37.2 ft	1.7 m	5.5 ft	15500 lx	1440 fc
1.53 m	5.0 ft	17.4 m	56.9 ft	2.6 m	8.4 ft	6621 lx	615 fc
3.05 m	10.0 ft	34.6 m	113.5 ft	5.1 m	16.8 ft	1666 lx	155 fc
3.95 m	13.0 ft	44.8 m	147.0 ft	6.6 m	21.7 ft	993 lx	92 fc
4.56 m	15.0 ft	51.7 m	169.7 ft	7.7 m	25.1 ft	745 lx	69 fc
6.10 m	20.0 ft	69.2 m	227.0 ft	10.2 m	33.6 ft	417 lx	39 fc
6.85 m	22.5 ft	77.7 m	254.9 ft	11.5 m	37.7 ft	330 lx	31 fc
7.63 m	25.0 ft	86.5 m	283.9 ft	12.8 m	42.0 ft	266 lx	25 fc
9.15 m	30.0 ft	103.8 m	340.5 ft	15.4 m	50.4 ft	185 lx	17 fc
10.07 m	33.0 ft	114.2 m	374.7 ft	16.9 m	55.4 ft	153 lx	14 fc