





Fixture photometric table

Fixture model
Color Force II 12
Field: 52°
Beam: 20°
Magnification (mf): 0.35 x
Candelas: 18900 Cd
Lumens: 3600 lm
Watts: 132 w
Lumen/w: 143.5 lm/w
CRI Ra: 92
TM-30 Rf / Rg: 88 / 105
Duv: -0.0012

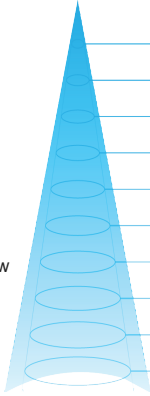


Throw Distance		Field Spread		Beam Spread		Full On	
m	ft	m	ft	m	ft	Lux	Footcandle
1.00 m	3.3 ft	1.0 m	3.2 ft	0.4 m	1.2 ft	18900 lx	1756 fc
1.53 m	5.0 ft	1.5 m	4.9 ft	0.5 m	1.8 ft	8074 lx	750 fc
3.05 m	10.0 ft	3.0 m	9.8 ft	1.1 m	3.5 ft	2032 lx	189 fc
3.95 m	13.0 ft	3.9 m	12.6 ft	1.4 m	4.6 ft	1211 lx	113 fc
4.56 m	15.0 ft	4.4 m	14.6 ft	1.6 m	5.3 ft	909 lx	84 fc
6.10 m	20.0 ft	6.0 m	19.5 ft	2.2 m	7.1 ft	508 lx	47 fc
6.85 m	22.5 ft	6.7 m	21.9 ft	2.4 m	7.9 ft	403 lx	37 fc
7.63 m	25.0 ft	7.4 m	24.4 ft	2.7 m	8.8 ft	325 lx	30 fc
9.15 m	30.0 ft	8.9 m	29.3 ft	3.2 m	10.6 ft	226 lx	21 fc
10.07 m	33.0 ft	9.8 m	32.2 ft	3.6 m	11.7 ft	186 lx	17 fc

Fixture model
Color Force II 12 BorderLens
Field: 74°
Beam: 36°
Magnification (mf): 0.65 x
Candelas: 5900 Cd
Lumens: 3100 lm
Watts: 132 w
Lumen/w: 45.2 lm/w
CRI Ra: 92
TM-30 Rf / Rg: 88 / 105
Duv: -0.0012

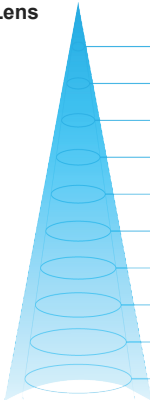

Throw Distance		Field Spread		Beam Spread		Full On	
m	ft	m	ft	m	ft	Lux	Footcandle
1.00 m	3.3 ft	1.5 m	4.9 ft	0.6 m	2.1 ft	5900 lx	548 fc
1.53 m	5.0 ft	2.3 m	7.6 ft	1.0 m	3.3 ft	2520 lx	234 fc
3.05 m	10.0 ft	4.6 m	15.1 ft	2.0 m	6.5 ft	634 lx	59 fc
3.95 m	13.0 ft	6.0 m	19.5 ft	2.6 m	8.4 ft	378 lx	35 fc
4.56 m	15.0 ft	6.9 m	22.5 ft	3.0 m	9.7 ft	284 lx	26 fc
6.10 m	20.0 ft	9.2 m	30.2 ft	4.0 m	13.0 ft	159 lx	15 fc
6.85 m	22.5 ft	10.3 m	33.9 ft	4.5 m	14.6 ft	126 lx	12 fc
7.63 m	25.0 ft	11.5 m	37.7 ft	5.0 m	16.3 ft	101 lx	9 fc
9.15 m	30.0 ft	13.8 m	45.2 ft	5.9 m	19.5 ft	70 lx	7 fc
10.07 m	33.0 ft	15.2 m	49.8 ft	6.5 m	21.5 ft	58 lx	5 fc

Fixture model
Color Force II 12 CycLens
Field: 118°
Beam: 70°
Magnification (mf): 1.40 x
Candelas: 4800 Cd
Lumens: 3300 lm
Watts: 132 w
Lumen/w: 37.0 lm/w
CRI Ra: 92
TM-30 Rf / Rg: 88 / 105
Duv: -0.0012

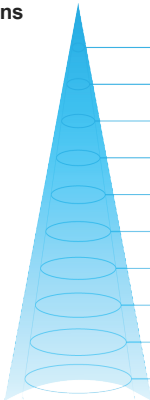

Throw Distance		Field Spread		Beam Spread		Full On	
m	ft	m	ft	m	ft	Lux	Footcandle
1.00 m	3.3 ft	3.3 m	10.9 ft	1.4 m	4.6 ft	4800 lx	446 fc
1.53 m	5.0 ft	5.1 m	16.7 ft	2.1 m	7.0 ft	2050 lx	190 fc
3.05 m	10.0 ft	10.2 m	33.3 ft	4.3 m	14.0 ft	516 lx	48 fc
3.95 m	13.0 ft	13.1 m	43.1 ft	5.5 m	18.1 ft	308 lx	29 fc
4.56 m	15.0 ft	15.2 m	49.8 ft	6.4 m	21.0 ft	231 lx	21 fc
6.10 m	20.0 ft	20.3 m	66.6 ft	8.5 m	28.0 ft	129 lx	12 fc
6.85 m	22.5 ft	22.8 m	74.8 ft	9.6 m	31.5 ft	102 lx	10 fc
7.63 m	25.0 ft	25.4 m	83.3 ft	10.7 m	35.1 ft	82 lx	8 fc
9.15 m	30.0 ft	30.5 m	99.9 ft	12.8 m	42.0 ft	57 lx	5 fc
10.07 m	33.0 ft	33.5 m	110.0 ft	14.1 m	46.3 ft	47 lx	4 fc