





## Fixture photometric table

**Fixture model**  
**Space Force 1x2 2800K**  
**Field:** 160°  
**Beam:** 80°  
**Magnification (mf):** 1.68 x  
**Candelas:** 4700 Cd  
**Lumens:** 9000 lm  
**Watts:** 160 w  
**Lumen/w:** 29.6 lm/w  
**CRI Ra:** 97  
**TM-30 Rf / Rg:** 93 / 98  
**Duv:** 0.0024

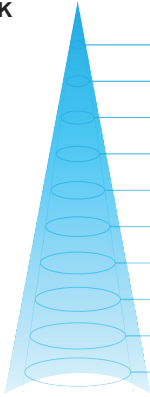


Throw Distance		Field Spread		Beam Spread		Full On	
m	ft	m	ft	m	ft	Lux	Footcandle
1.00 m	3.3 ft	11.3 m	37.2 ft	1.7 m	5.5 ft	4700 lx	437 fc
1.53 m	5.0 ft	17.4 m	56.9 ft	2.6 m	8.4 ft	2008 lx	187 fc
3.05 m	10.0 ft	34.6 m	113.5 ft	5.1 m	16.8 ft	505 lx	47 fc
3.95 m	13.0 ft	44.8 m	147.0 ft	6.6 m	21.7 ft	301 lx	28 fc
4.56 m	15.0 ft	51.7 m	169.7 ft	7.7 m	25.1 ft	226 lx	21 fc
6.10 m	20.0 ft	69.2 m	227.0 ft	10.2 m	33.6 ft	126 lx	12 fc
6.85 m	22.5 ft	77.7 m	254.9 ft	11.5 m	37.7 ft	100 lx	9 fc
7.63 m	25.0 ft	86.5 m	283.9 ft	12.8 m	42.0 ft	81 lx	8 fc
9.15 m	30.0 ft	103.8 m	340.5 ft	15.4 m	50.4 ft	56 lx	5 fc
10.07 m	33.0 ft	114.2 m	374.7 ft	16.9 m	55.4 ft	46 lx	4 fc

**Fixture model**  
**Space Force 1x2 3200K**  
**Field:** 160°  
**Beam:** 80°  
**Magnification (mf):** 1.68 x  
**Candelas:** 6100 Cd  
**Lumens:** 11600 lm  
**Watts:** 192 w  
**Lumen/w:** 31.8 lm/w  
**CRI Ra:** 95  
**TM-30 Rf / Rg:** 92 / 103  
**Duv:** -0.0023

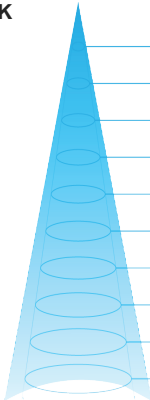

Throw Distance		Field Spread		Beam Spread		Full On	
m	ft	m	ft	m	ft	Lux	Footcandle
1.00 m	3.3 ft	11.3 m	37.2 ft	1.7 m	5.5 ft	6100 lx	567 fc
1.53 m	5.0 ft	17.4 m	56.9 ft	2.6 m	8.4 ft	2606 lx	242 fc
3.05 m	10.0 ft	34.6 m	113.5 ft	5.1 m	16.8 ft	656 lx	61 fc
3.95 m	13.0 ft	44.8 m	147.0 ft	6.6 m	21.7 ft	391 lx	36 fc
4.56 m	15.0 ft	51.7 m	169.7 ft	7.7 m	25.1 ft	293 lx	27 fc
6.10 m	20.0 ft	69.2 m	227.0 ft	10.2 m	33.6 ft	164 lx	15 fc
6.85 m	22.5 ft	77.7 m	254.9 ft	11.5 m	37.7 ft	130 lx	12 fc
7.63 m	25.0 ft	86.5 m	283.9 ft	12.8 m	42.0 ft	105 lx	10 fc
9.15 m	30.0 ft	103.8 m	340.5 ft	15.4 m	50.4 ft	73 lx	7 fc
10.07 m	33.0 ft	114.2 m	374.7 ft	16.9 m	55.4 ft	60 lx	6 fc

**Fixture model**  
**Space Force 1x2 4400K**  
**Field:** 160°  
**Beam:** 80°  
**Magnification (mf):** 1.68 x  
**Candelas:** 7200 Cd  
**Lumens:** 13800 lm  
**Watts:** 189 w  
**Lumen/w:** 38.1 lm/w  
**CRI Ra:** 92  
**TM-30 Rf / Rg:** 88 / 102  
**Duv:** -0.0038

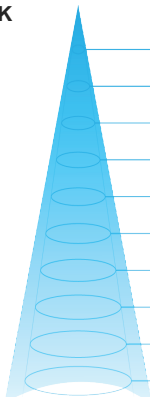


Throw Distance		Field Spread		Beam Spread		Full On	
m	ft	m	ft	m	ft	Lux	Footcandle
1.00 m	3.3 ft	11.3 m	37.2 ft	1.7 m	5.5 ft	7200 lx	669 fc
1.53 m	5.0 ft	17.4 m	56.9 ft	2.6 m	8.4 ft	3076 lx	286 fc
3.05 m	10.0 ft	34.6 m	113.5 ft	5.1 m	16.8 ft	774 lx	72 fc
3.95 m	13.0 ft	44.8 m	147.0 ft	6.6 m	21.7 ft	461 lx	43 fc
4.56 m	15.0 ft	51.7 m	169.7 ft	7.7 m	25.1 ft	346 lx	32 fc
6.10 m	20.0 ft	69.2 m	227.0 ft	10.2 m	33.6 ft	193 lx	18 fc
6.85 m	22.5 ft	77.7 m	254.9 ft	11.5 m	37.7 ft	153 lx	14 fc
7.63 m	25.0 ft	86.5 m	283.9 ft	12.8 m	42.0 ft	124 lx	11 fc
9.15 m	30.0 ft	103.8 m	340.5 ft	15.4 m	50.4 ft	86 lx	8 fc
10.07 m	33.0 ft	114.2 m	374.7 ft	16.9 m	55.4 ft	71 lx	7 fc



Chroma-Q


## Fixture photometric table

**Fixture model**  
**Space Force 1x2 5600K**  
**Field:** 160°  
**Beam:** 80°  
**Magnification (mf):** 1.68 x  
**Candelas:** 6700 Cd  
**Lumens:** 12900 lm  
**Watts:** 158 w  
**Lumen/w:** 42.5 lm/w  
**CRI Ra:** 88  
**TM-30 Rf / Rg:** 85 / 101  
**Duv:** -0.0015

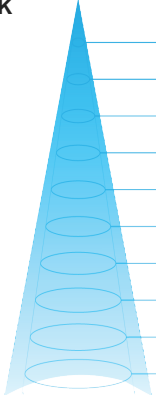

Throw Distance		Field Spread		Beam Spread		Full On	
m	ft	m	ft	m	ft	Lux	Footcandle
1.00 m	3.3 ft	11.3 m	37.2 ft	1.7 m	5.5 ft	6700 lx	622 fc
1.53 m	5.0 ft	17.4 m	56.9 ft	2.6 m	8.4 ft	2862 lx	266 fc
3.05 m	10.0 ft	34.6 m	113.5 ft	5.1 m	16.8 ft	720 lx	67 fc
3.95 m	13.0 ft	44.8 m	147.0 ft	6.6 m	21.7 ft	429 lx	40 fc
4.56 m	15.0 ft	51.7 m	169.7 ft	7.7 m	25.1 ft	322 lx	30 fc
6.10 m	20.0 ft	69.2 m	227.0 ft	10.2 m	33.6 ft	180 lx	17 fc
6.85 m	22.5 ft	77.7 m	254.9 ft	11.5 m	37.7 ft	143 lx	13 fc
7.63 m	25.0 ft	86.5 m	283.9 ft	12.8 m	42.0 ft	115 lx	11 fc
9.15 m	30.0 ft	103.8 m	340.5 ft	15.4 m	50.4 ft	80 lx	7 fc
10.07 m	33.0 ft	114.2 m	374.7 ft	16.9 m	55.4 ft	66 lx	6 fc

**Fixture model**  
**Space Force 1x2 6000K**  
**Field:** 160°  
**Beam:** 80°  
**Magnification (mf):** 1.68 x  
**Candelas:** 6900 Cd  
**Lumens:** 13200 lm  
**Watts:** 163 w  
**Lumen/w:** 42.4 lm/w  
**CRI Ra:** 87  
**TM-30 Rf / Rg:** 84 / 100  
**Duv:** 0.0002

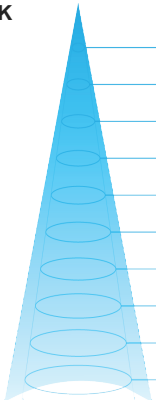

Throw Distance		Field Spread		Beam Spread		Full On	
m	ft	m	ft	m	ft	Lux	Footcandle
1.00 m	3.3 ft	11.3 m	37.2 ft	1.7 m	5.5 ft	6900 lx	641 fc
1.53 m	5.0 ft	17.4 m	56.9 ft	2.6 m	8.4 ft	2948 lx	274 fc
3.05 m	10.0 ft	34.6 m	113.5 ft	5.1 m	16.8 ft	742 lx	69 fc
3.95 m	13.0 ft	44.8 m	147.0 ft	6.6 m	21.7 ft	442 lx	41 fc
4.56 m	15.0 ft	51.7 m	169.7 ft	7.7 m	25.1 ft	332 lx	31 fc
6.10 m	20.0 ft	69.2 m	227.0 ft	10.2 m	33.6 ft	185 lx	17 fc
6.85 m	22.5 ft	77.7 m	254.9 ft	11.5 m	37.7 ft	147 lx	14 fc
7.63 m	25.0 ft	86.5 m	283.9 ft	12.8 m	42.0 ft	119 lx	11 fc
9.15 m	30.0 ft	103.8 m	340.5 ft	15.4 m	50.4 ft	82 lx	8 fc
10.07 m	33.0 ft	114.2 m	374.7 ft	16.9 m	55.4 ft	68 lx	6 fc