

IES Photometric Report 2inspire 100

Chroma-Q_2inspire_100_Asymmetrical_Snoot_4800K.IES



Generated: 5/4/2026 2:13:59 PM

Generated: 5/4/2026 2:13:59 PM

Fixture Information


Manufacturer	Chroma-Q	Max Candela	2431.4 cd
Luminaire	LED Projector Luminaire at 4800K setting	Est. Total Lumens	774 lm
Lamp	LEDs	Beam Angle (50%)	28.8°
Format	IESNA:LM-63-2002	Field Angle (10%)	61.2°
Wattage	22.2 W	Phot. Type	Type C (Vertical)
Lumens/Lamp	775 lm	Units	Meters
Num Lamps	1	W x L x H	-0.120 x -0.120 x 0.000
Ballast Factor	1.000		


Photometric Data


V Angles	181 (0° – 180°)
H Angles	25 (0° – 360°)

IES Keywords

[TEST]	EV-2002
[TESTLAB]	Spectrum mfg
[TESTDATE]	03-07-2025
[MANUFAC]	Chroma-Q
[LUMCAT]	2inspire-POE-100_Asymmetrical_Snoot(4800K)
[LUMINAIRE]	LED Projector Luminaire at 4800K setting
[LAMP]	LEDs
[BALLAST]	DC
[BALLASTCAT]	
[_VOLTAGE]	65.17
[_CURRENT]	0.34
[_WATTAGE]	22.16
[_PF]	0.53
[_THD]	0.0
[_LUMENS]	775.35
[_EFFICACY]	34.97
[_STABILIZATION TIME]	70

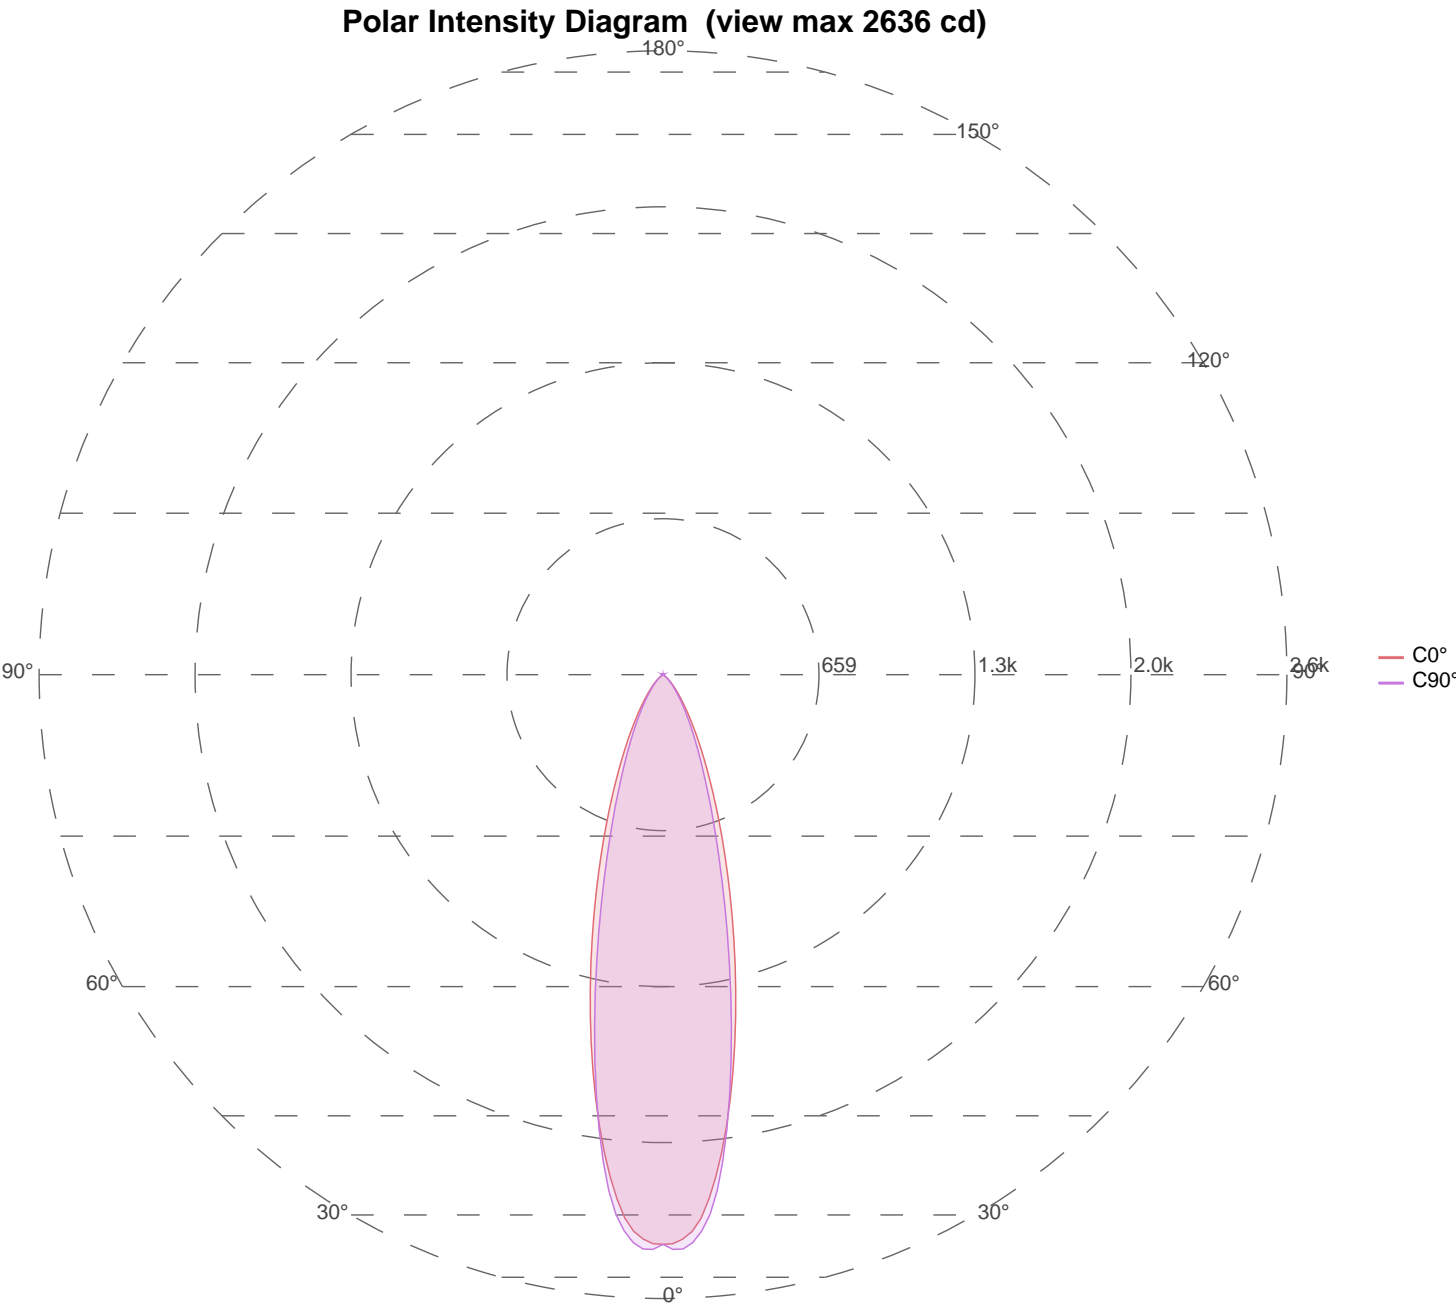

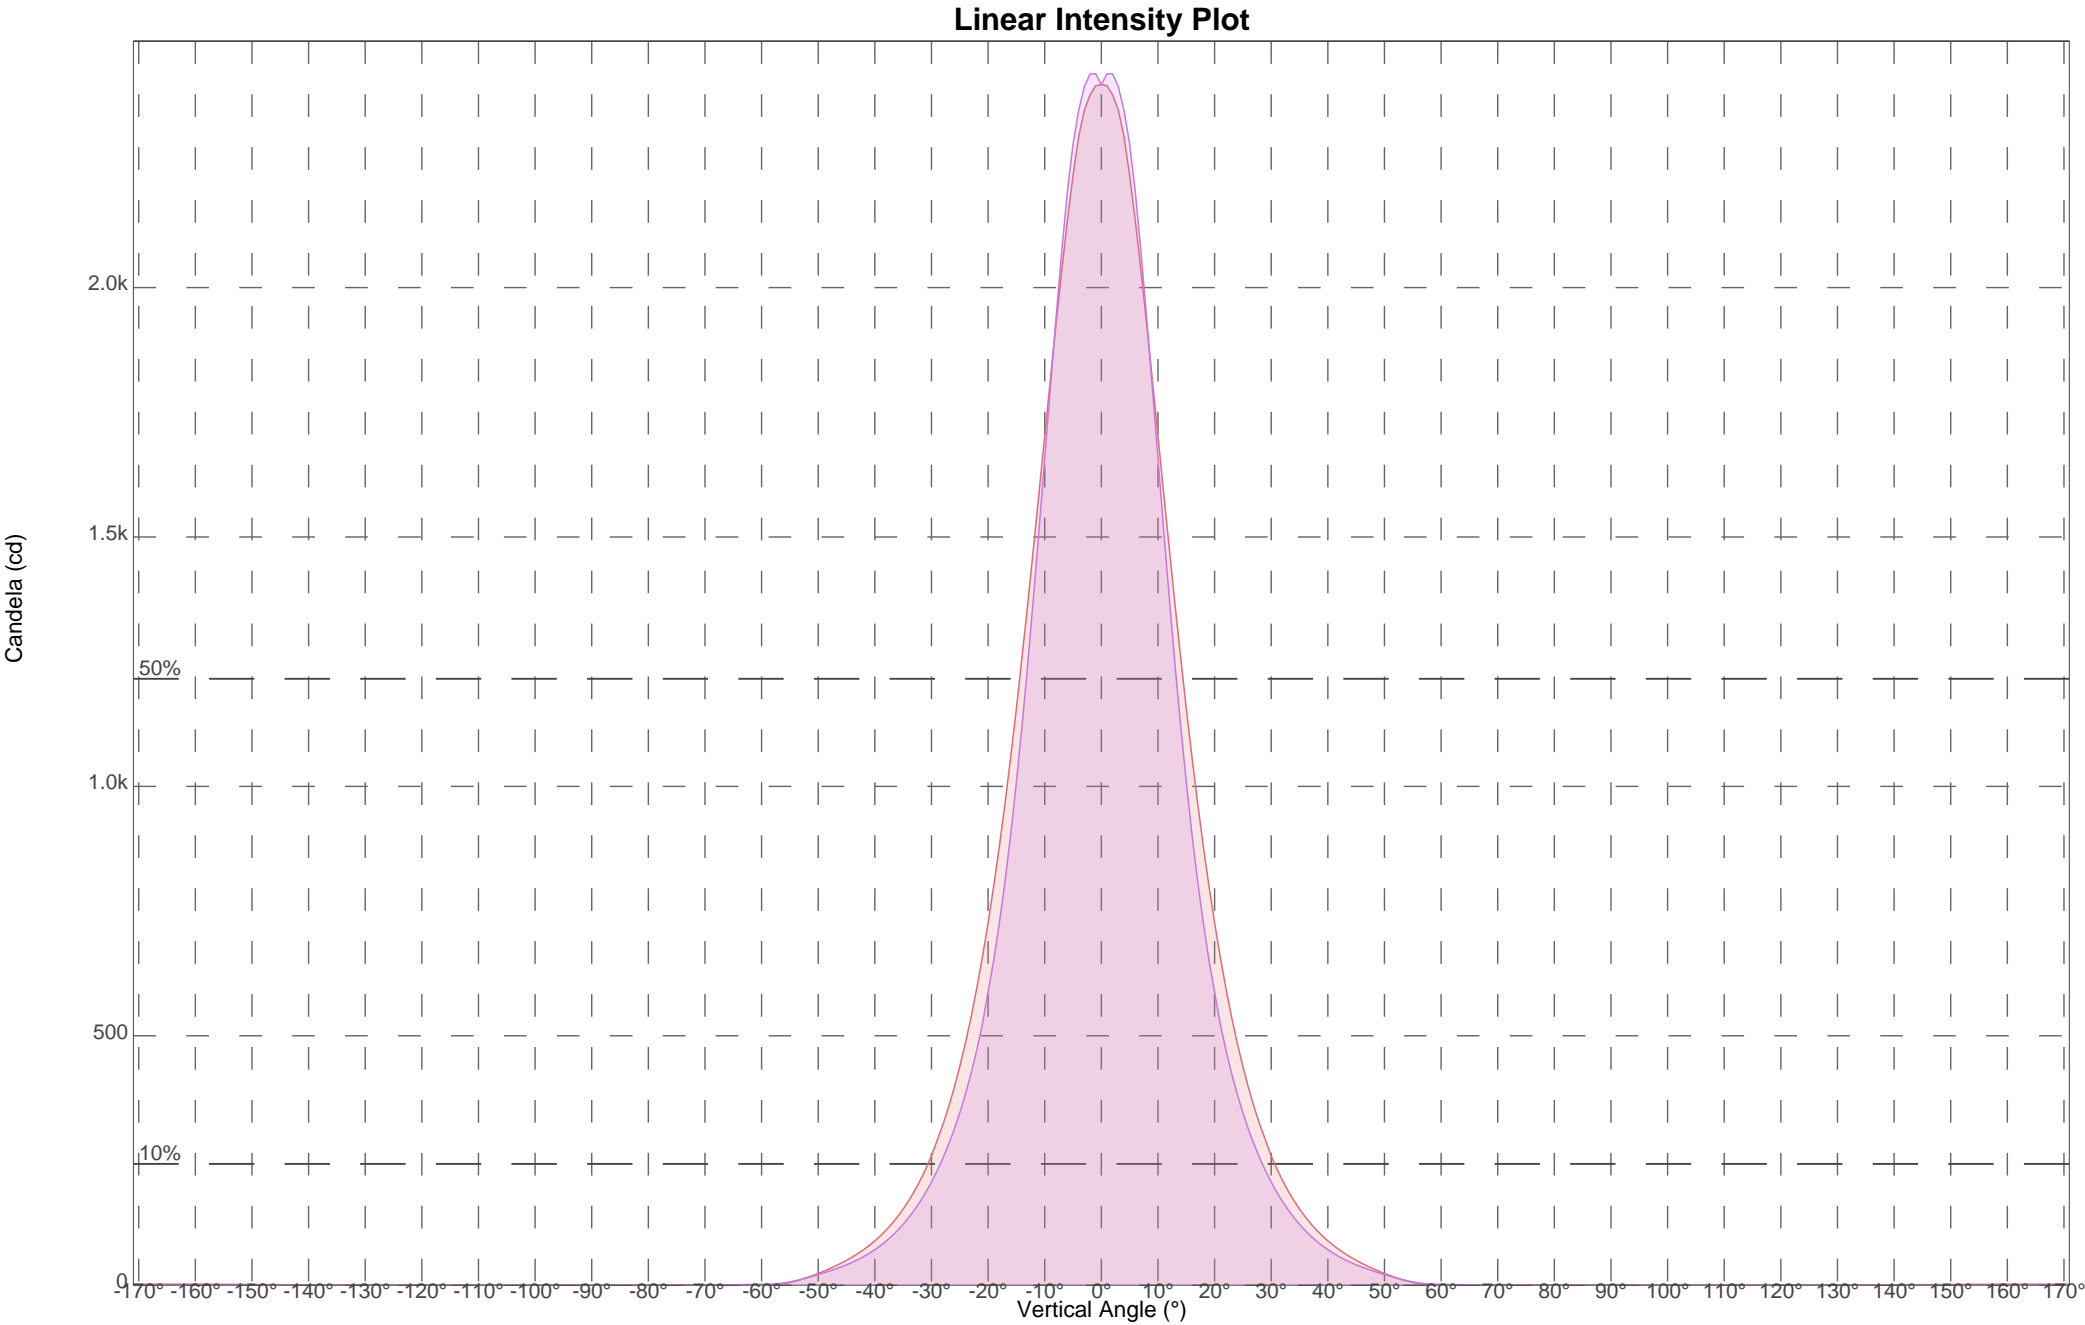

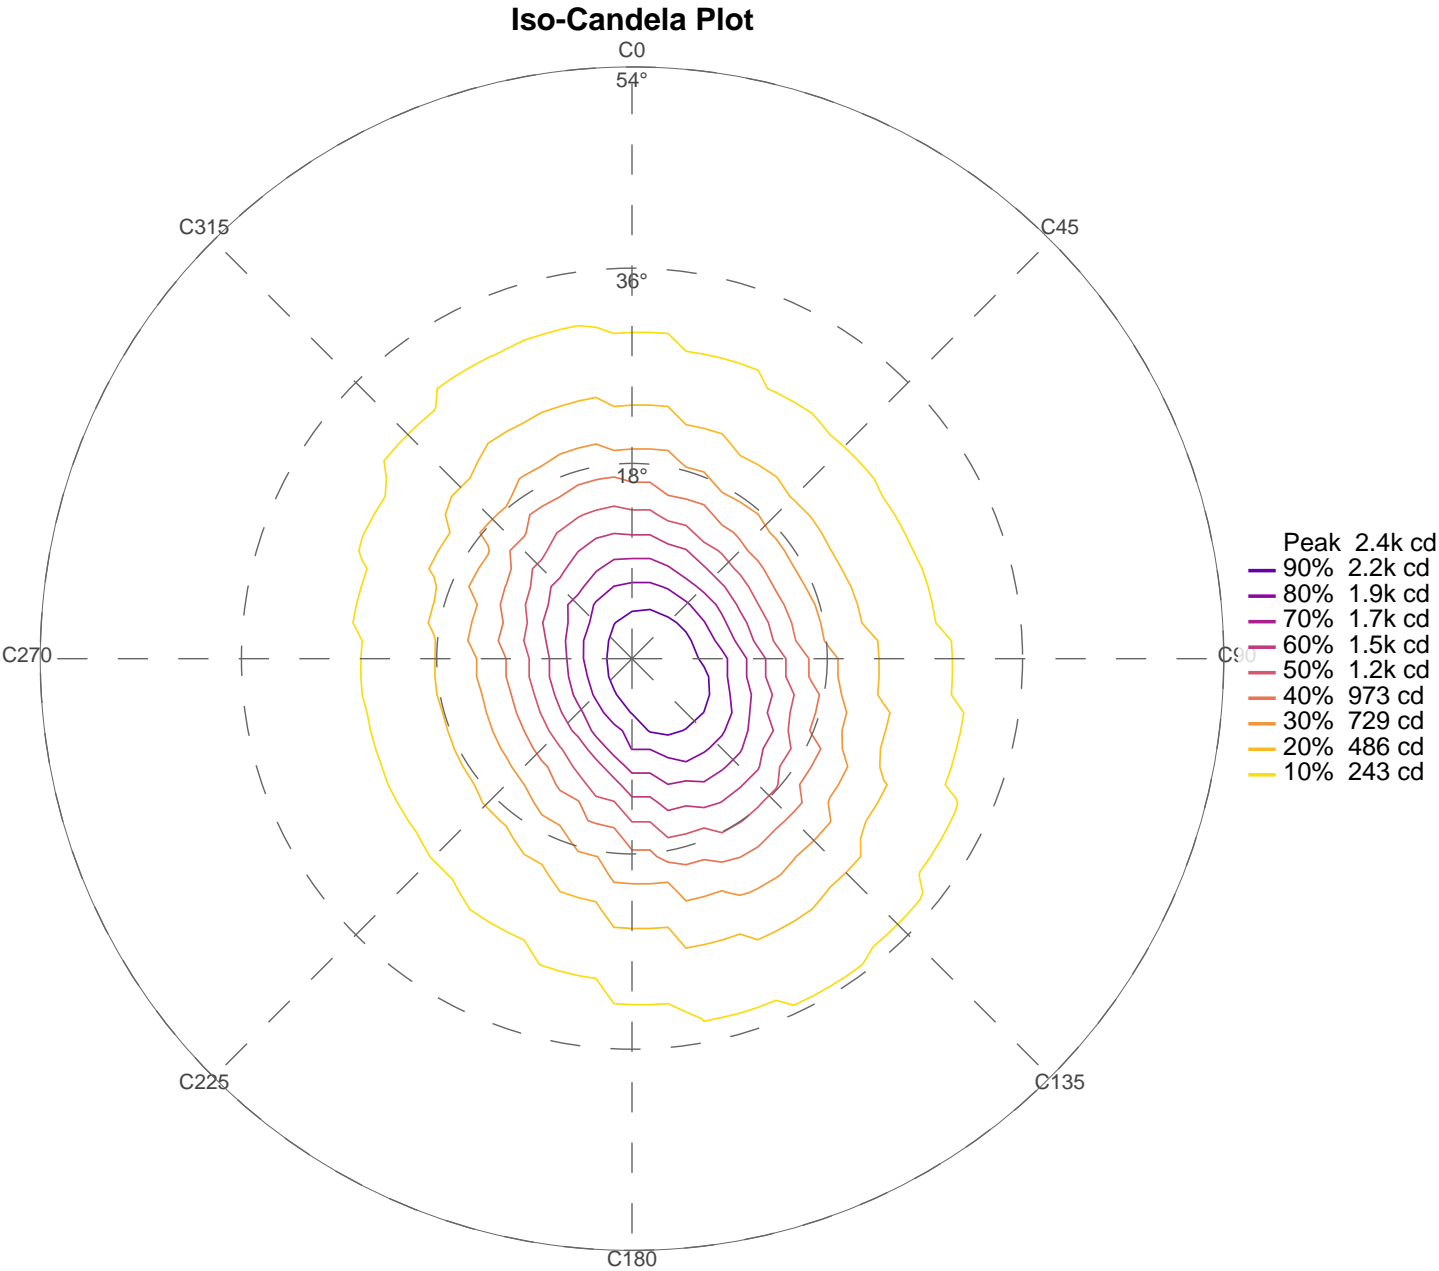


Settings


Distance unit	Meters (m)
Light unit	Lux (lx)
Spread mode	Fixture count
C-Plane	All C-Planes
Output Height	1.6 m
Floor X	5.0 m
Floor Y	5.0 m
Fixture grid	1 x 1 (1)
Wall dist X	0.30 m
Wall dist Y	0.30 m

Results


Peak	188.3 lx
Average	16.0 lx
Min	0.0 lx
Result grid	6 x 6 @ 1.0 m

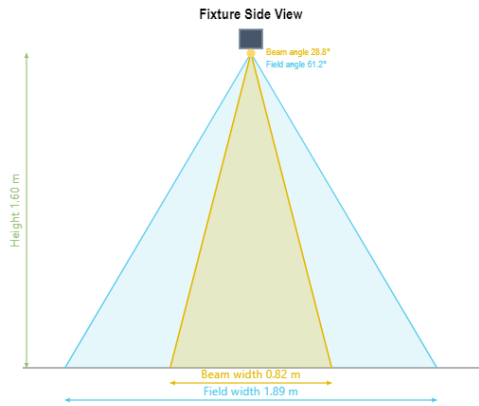

Iso-Illuminance

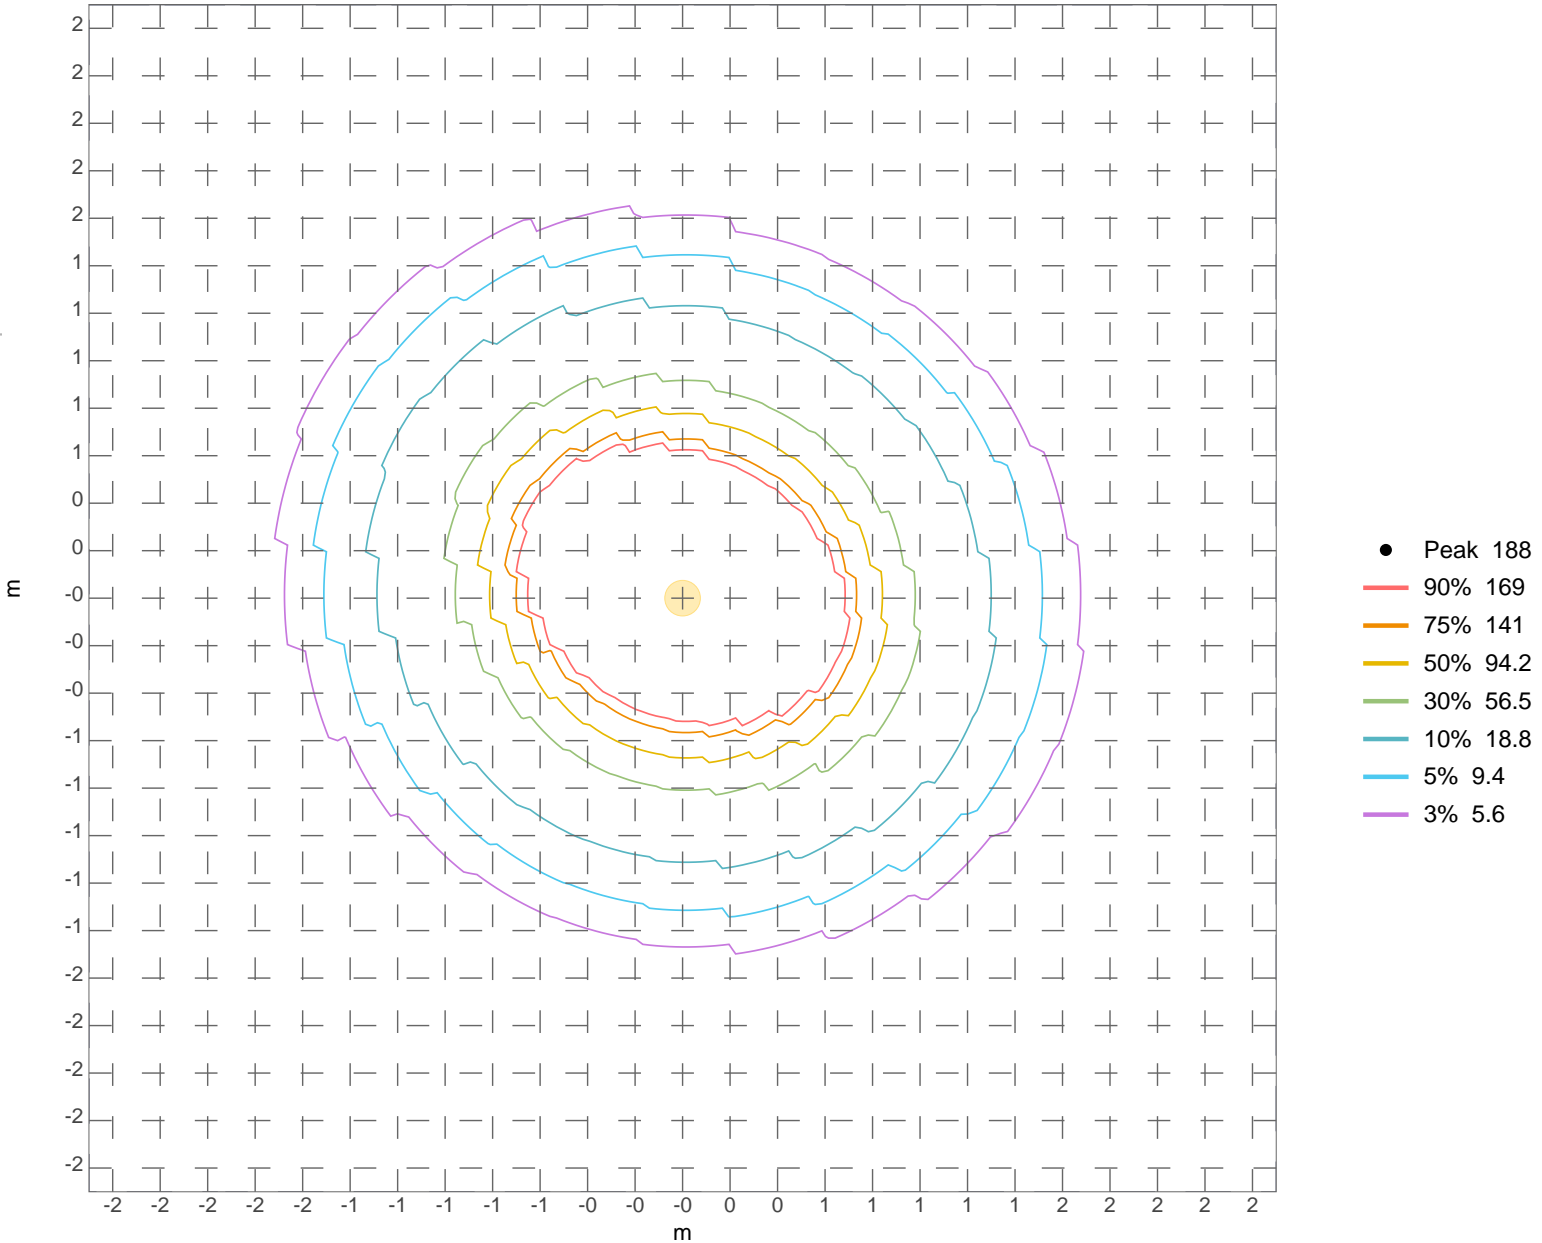

Beam Intensity

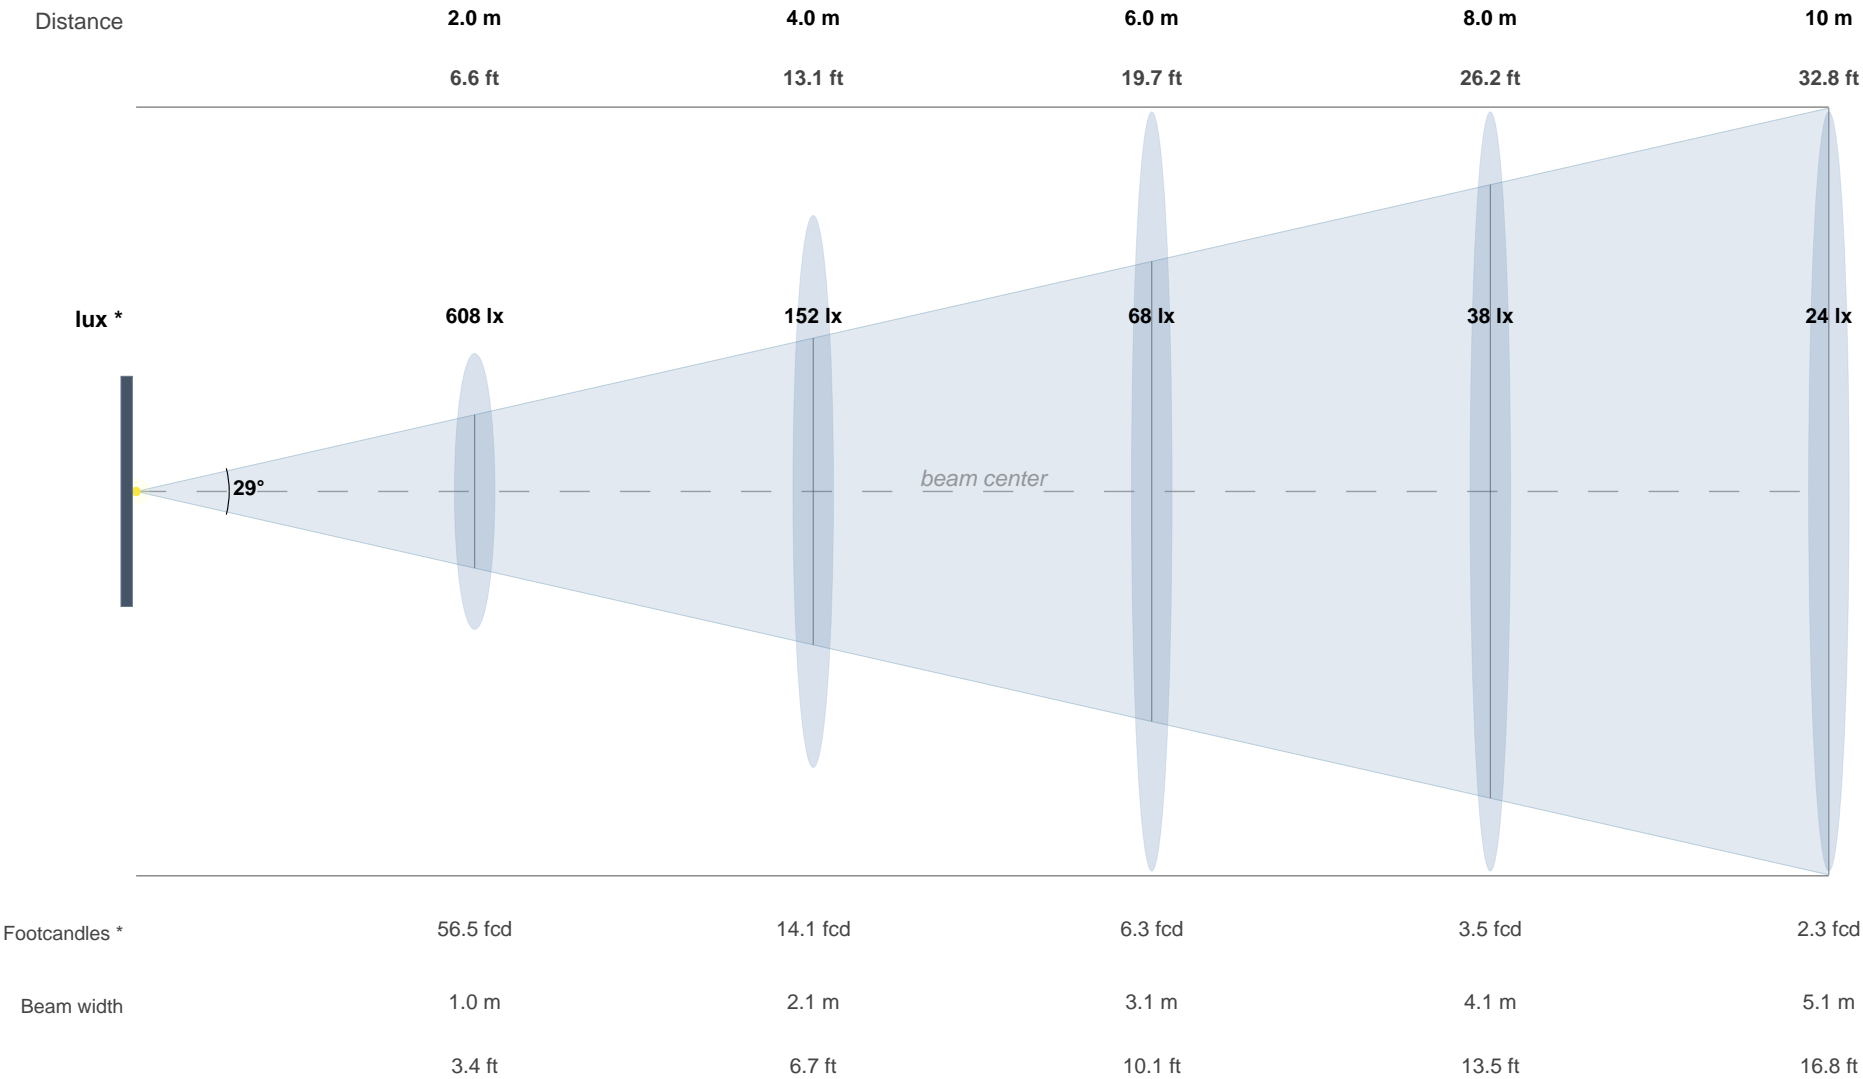

* at beam centre