

IES Photometric Report 2inspire 200

Chroma-Q_2inspire_200_Medium_5600K.IES



Generated: 5/4/2026 2:10:04 PM

Generated: 5/4/2026 2:10:04 PM

Fixture Information

Manufacturer	Chroma-Q	Max Candela	2159.3 cd
Luminaire	2inspire-POE 200 with Medium Diffusion	Est. Total Lumens	1484 lm
Lamp	LEDs	Beam Angle (50%)	41.1°
Format	IESNA:LM-63-2002	Field Angle (10%)	86.0°
Wattage	30.0 W	Phot. Type	Type C (Vertical)
Lumens/Lamp	Absolute	Units	Feet
Num Lamps	1	W x L x H	-0.271 x -0.271 x 0.000
Ballast Factor	1.000		


Photometric Data


V Angles	91 (0° – 90°)
H Angles	145 (0° – 360°)

IES Keywords


[TEST]	EV-2002
[TESTLAB]	Spectrum mfg
[ISSUEDATE]	2024-01-24
[MANUFAC]	Chroma-Q
[LUMCAT]	2inspire-POE-200 (5600K)
[LUMINAIRE]	2inspire-POE 200 with Medium Diffusion
[LAMP]	LEDs
[BALLAST]	DC
[BALLASTCAT]	
[_VOLTAGE]	53.0
[_CURRENT]	0.551
[_WATTAGE]	29.7
[_PF]	1.0
[_THD]	0.0
[_LUMENS]	1485
[_EFFICACY]	50
[_STABILIZATION TIME]	70

Polar Intensity Diagram (view max 2341 cd)

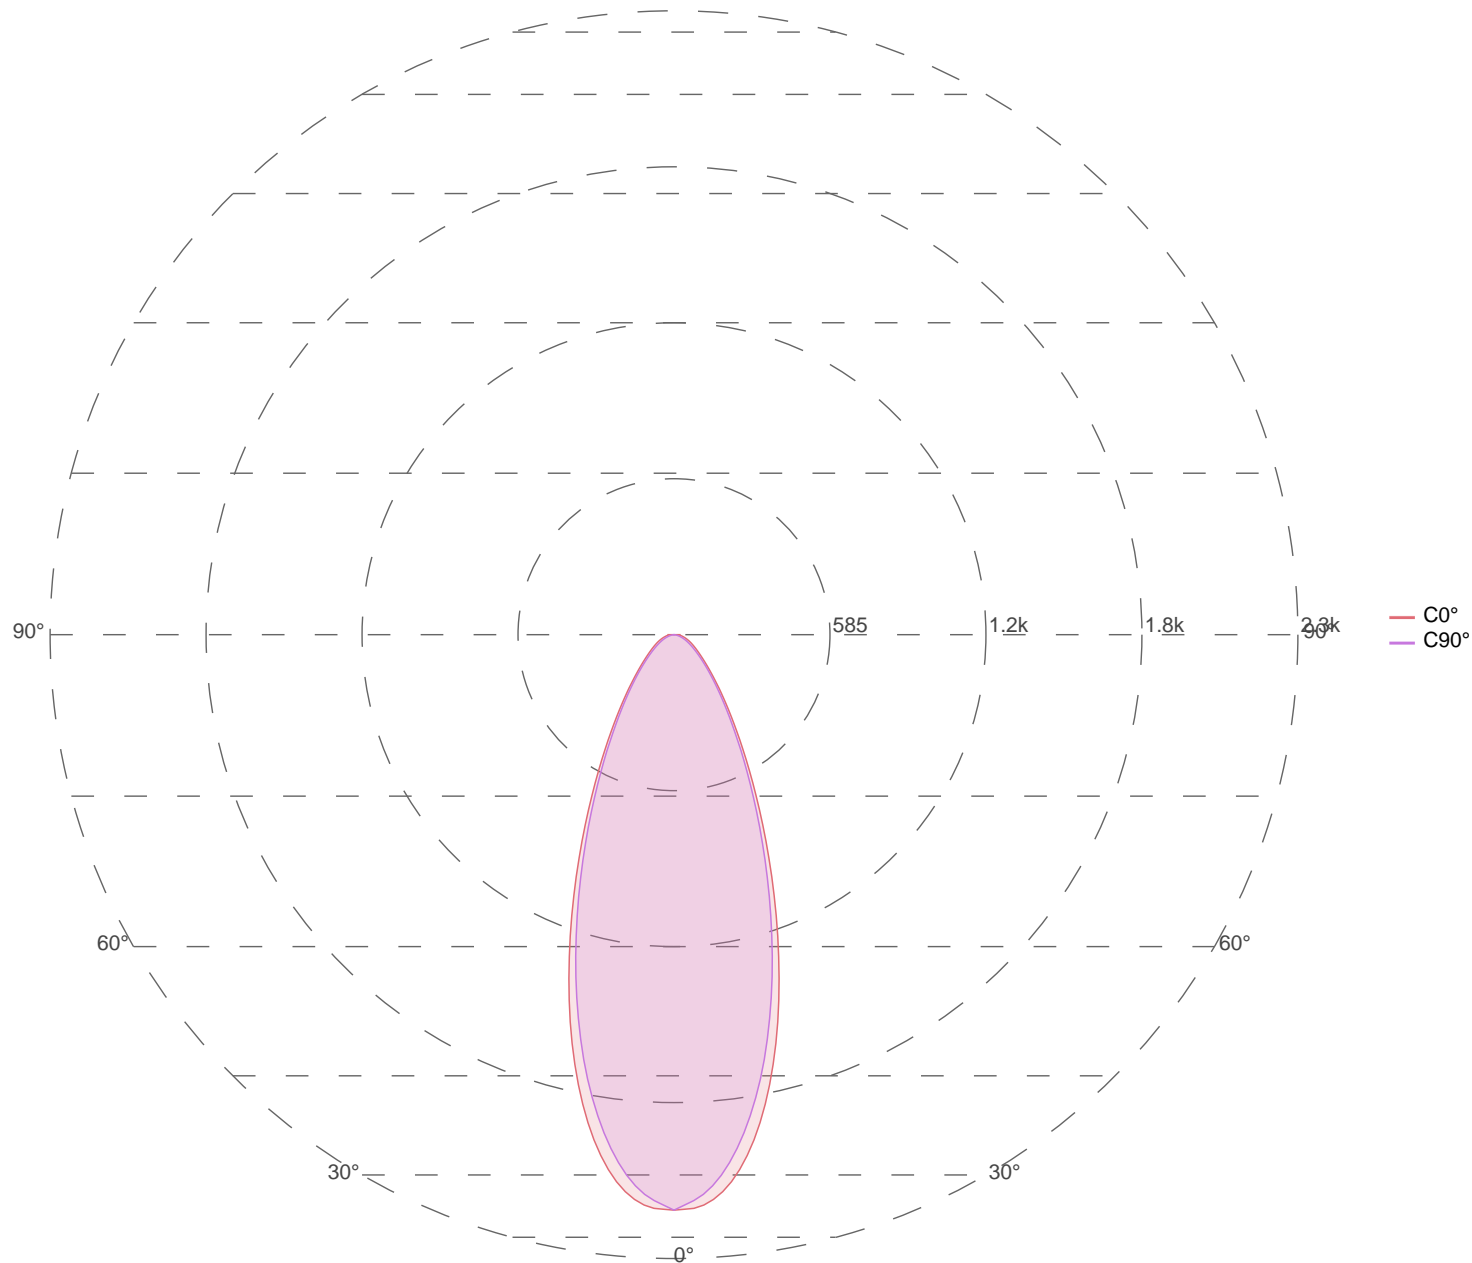

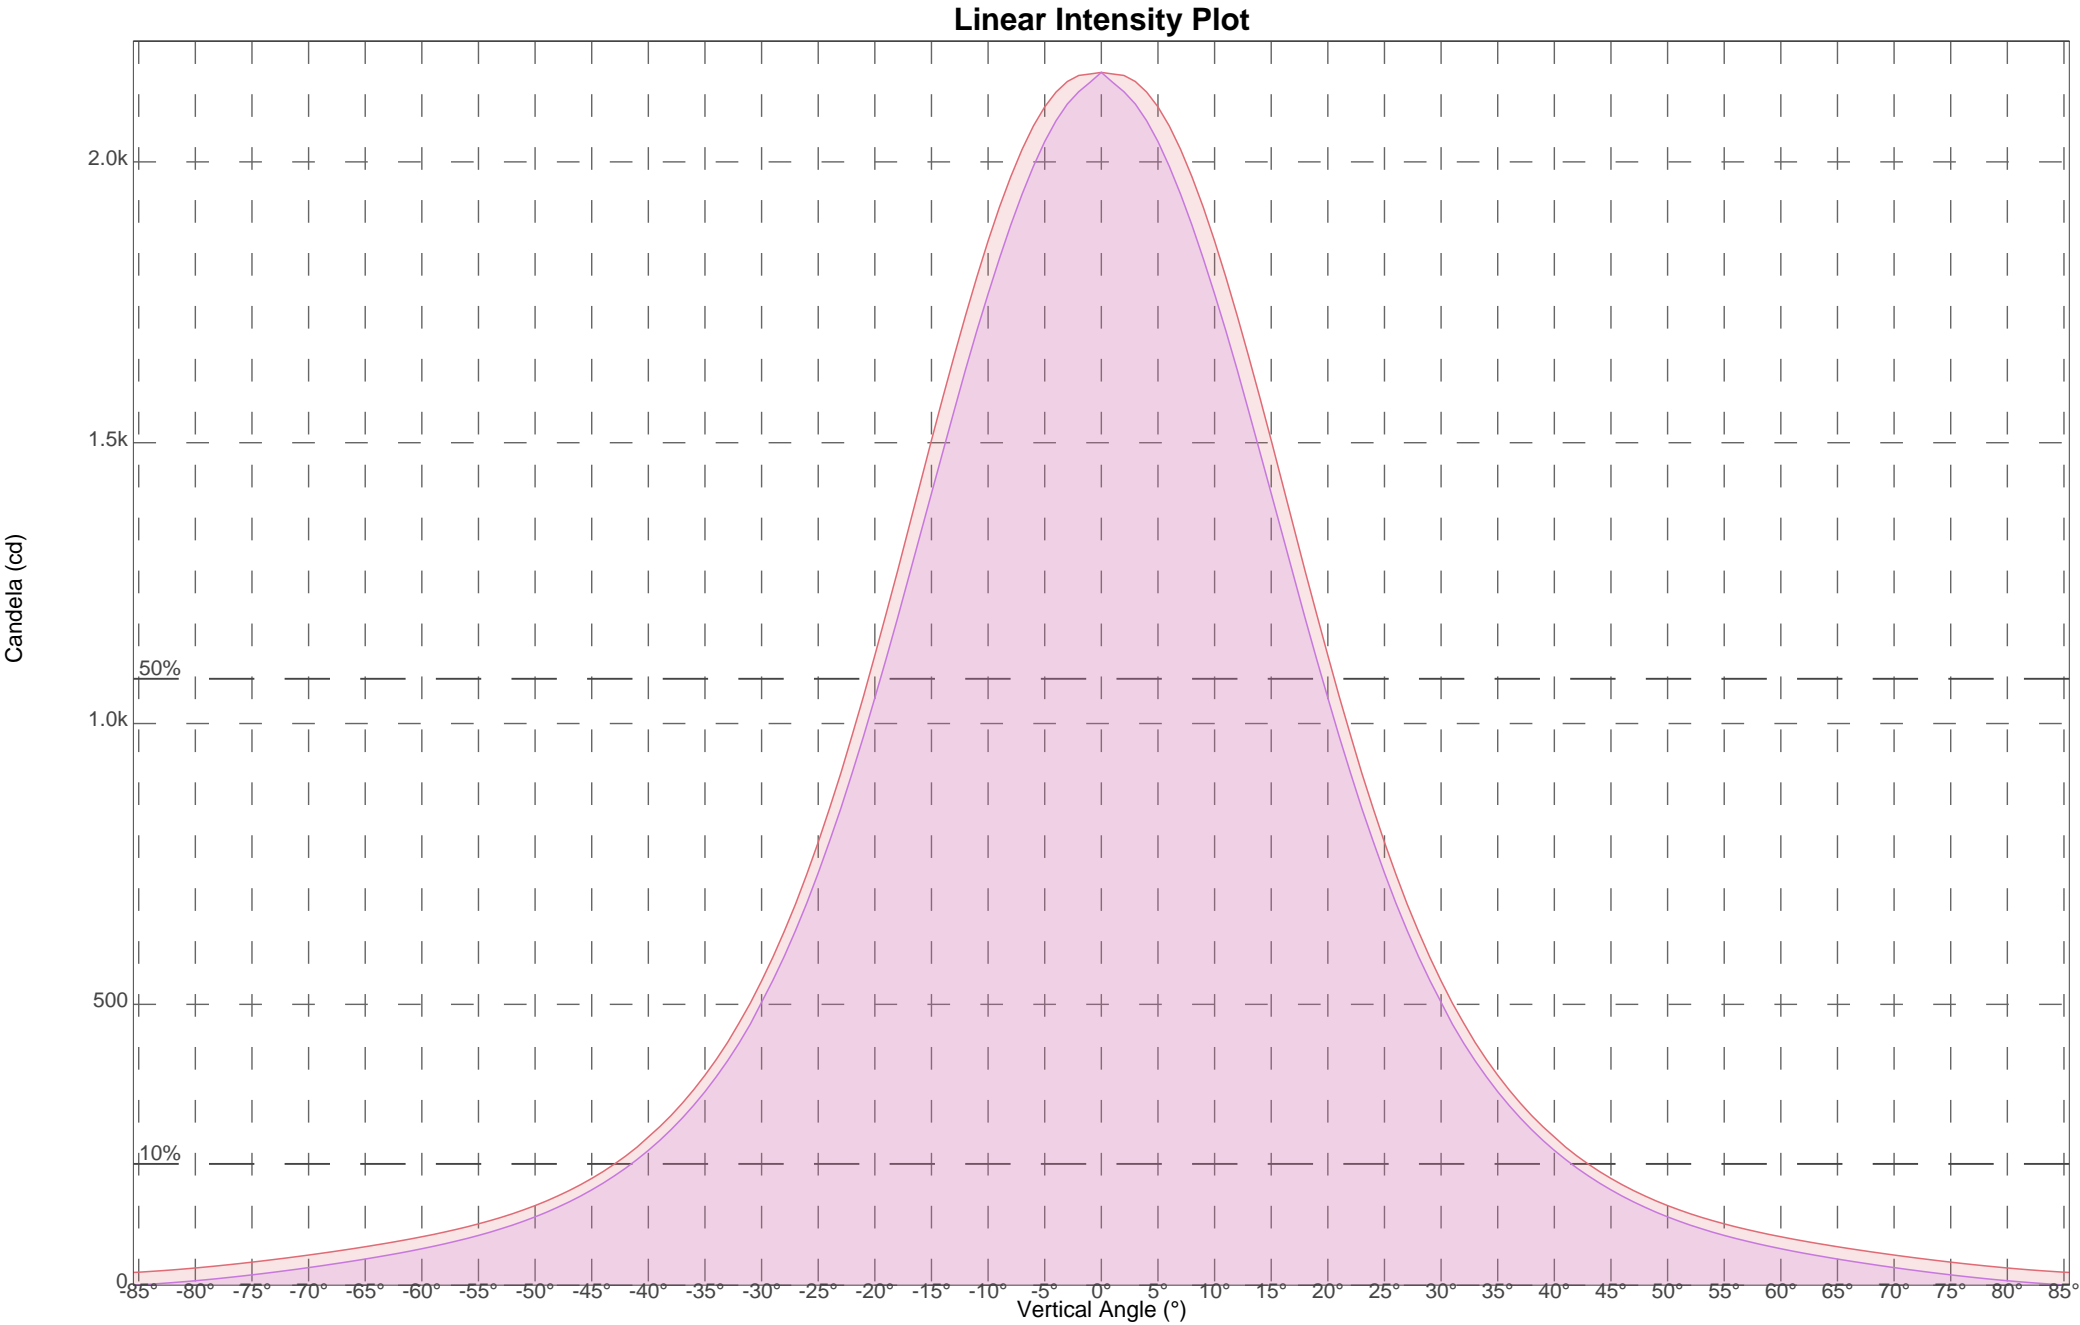

Iso-Candela Plot

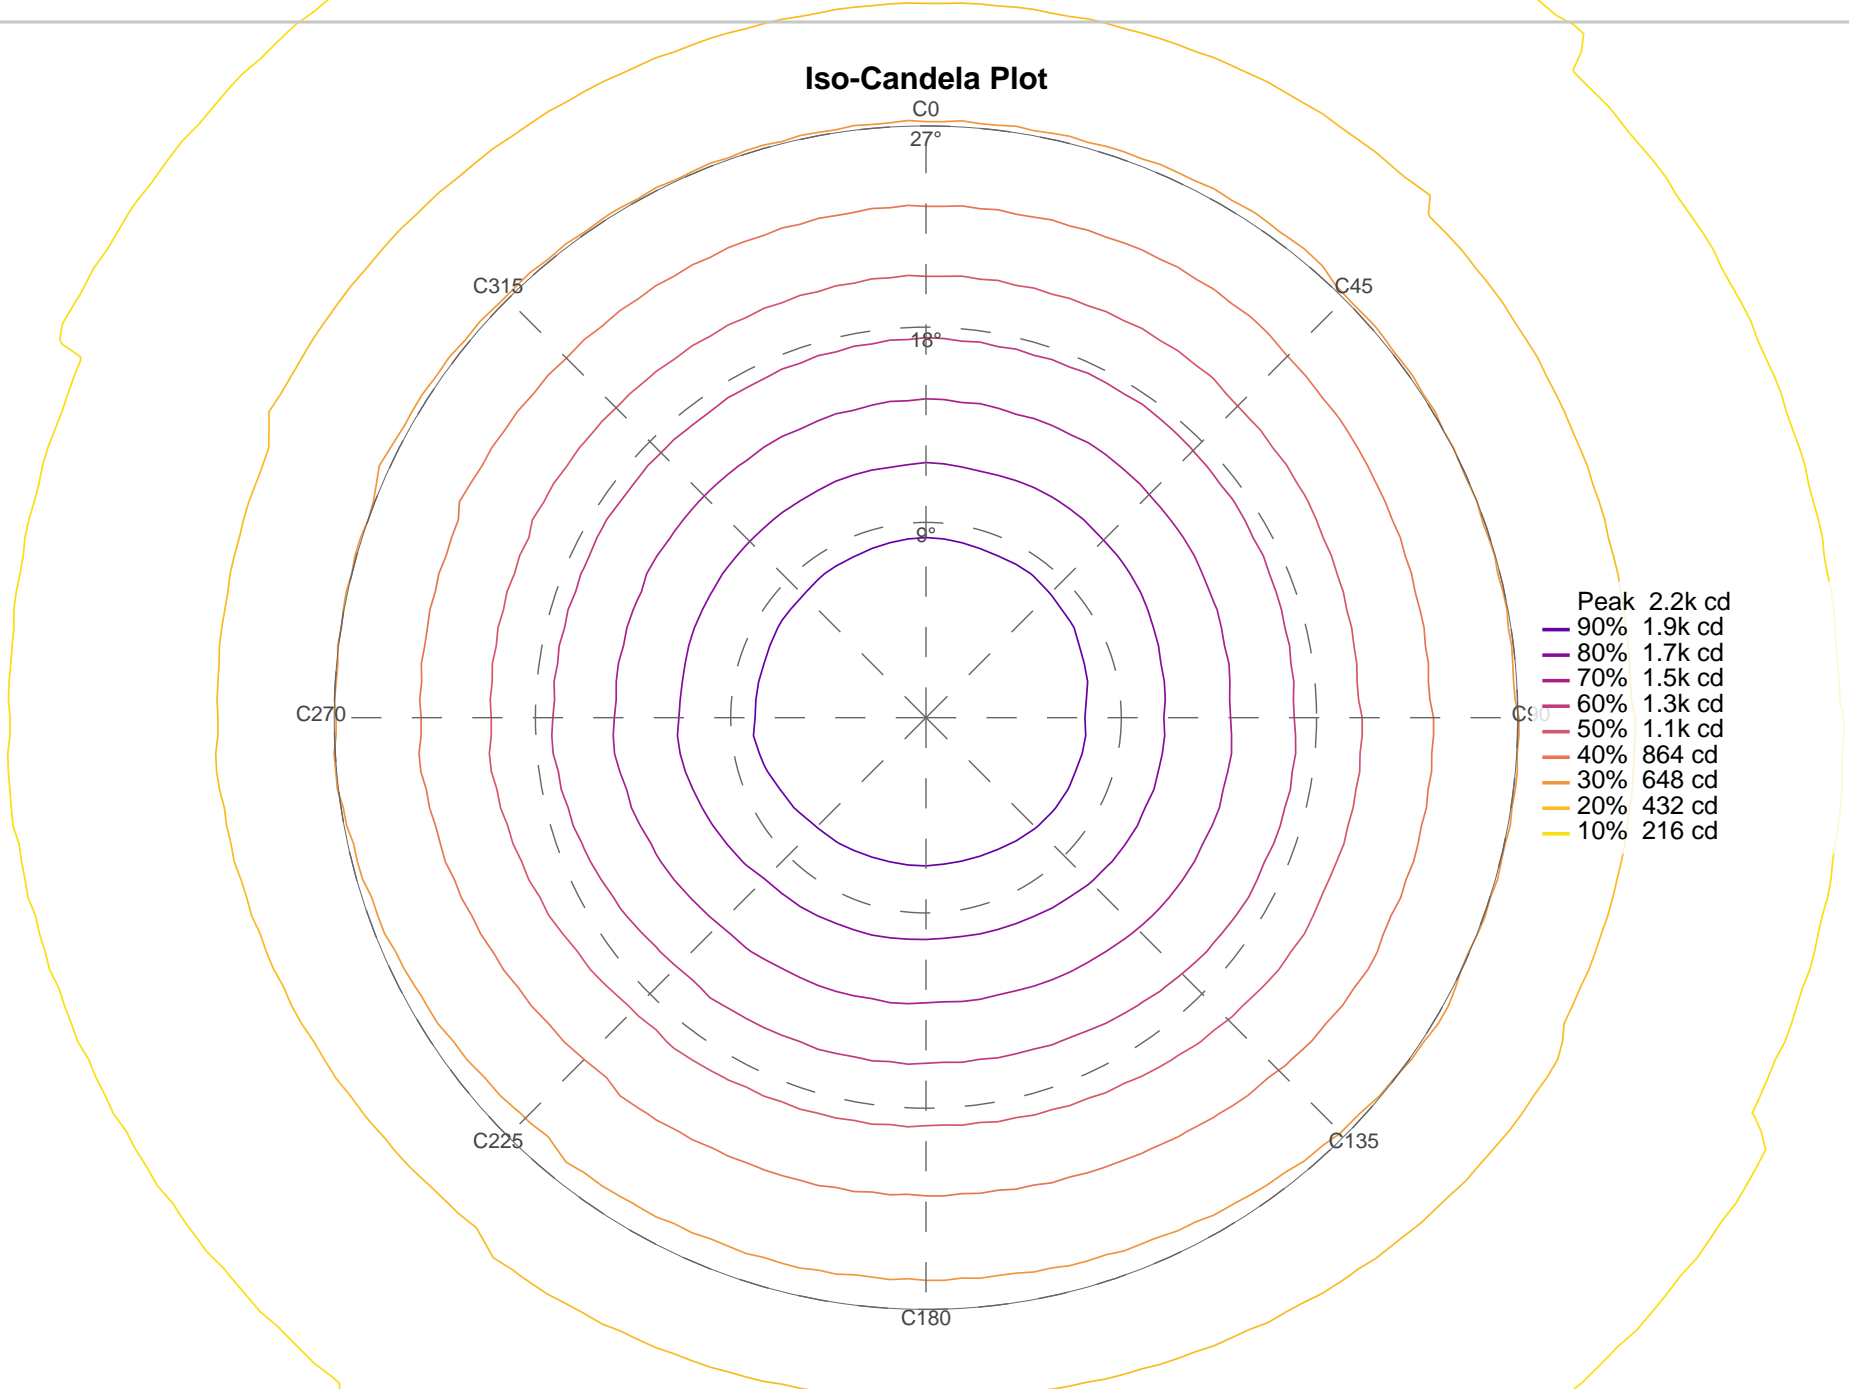


Settings


Distance unit	Meters (m)
Light unit	Lux (lx)
Spread mode	Fixture count
C-Plane	All C-Planes
Output Height	1.6 m
Floor X	5.0 m
Floor Y	5.0 m
Fixture grid	1 x 1 (1)
Wall dist X	0.30 m
Wall dist Y	0.30 m

Results


Peak	257.4 lx
Average	35.4 lx
Min	1.1 lx
Result grid	6 x 6 @ 1.0 m

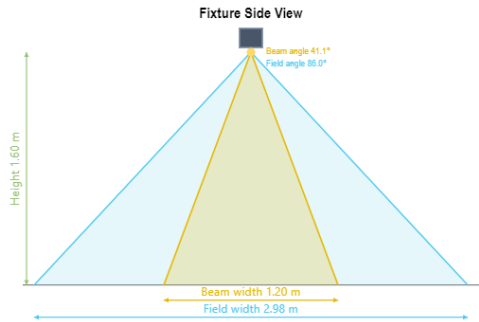

Iso-Illuminance

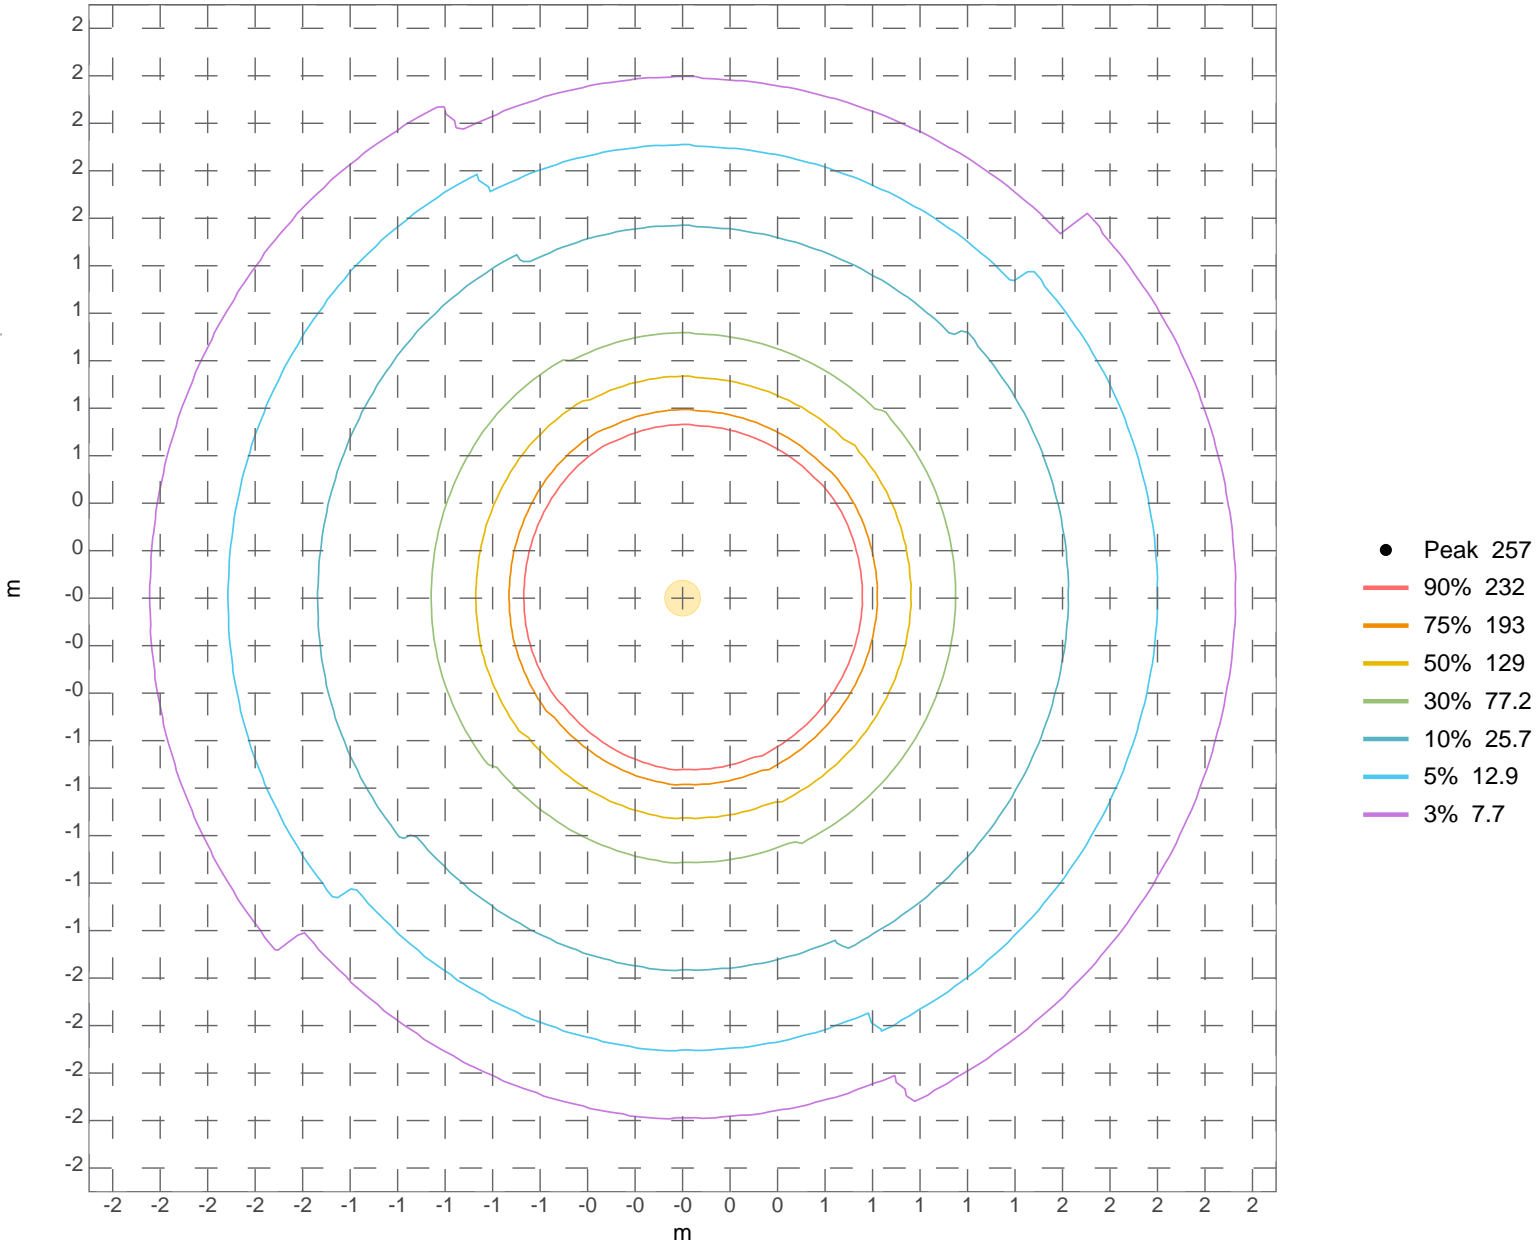

Beam Intensity

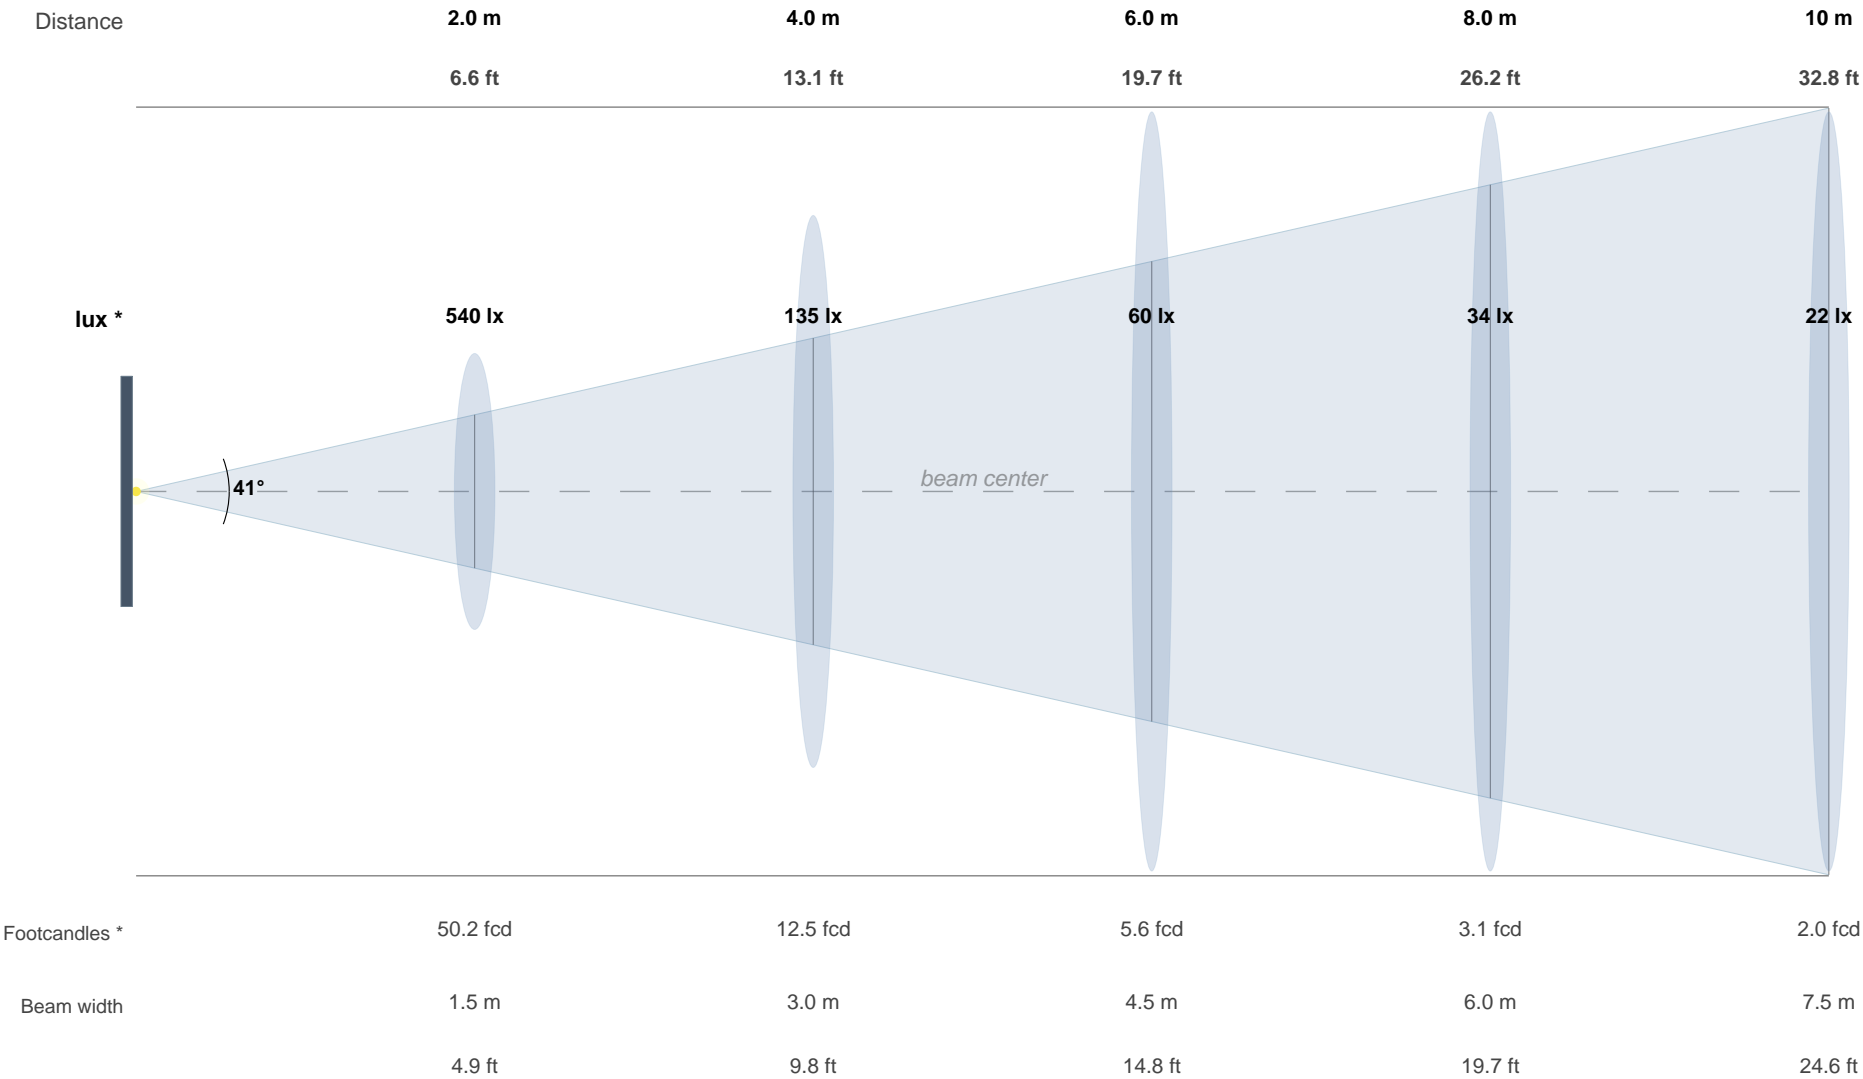

* at beam centre